



ITS-WHT-89853S300PPM




PRODUCT DETAILS

| | | | |
|--|--------------------|---------------------|---|
| Manufacturer : | Jaquar | Type: | Automatic Rimless Floor Mounted WC |
| Colour: | White | Flush valves | Dual Flush - 4.2/6 LPF |
| Outlet | Vertical | Material: | White PP Seat Cover/ Ceramic Vitreous China |
| Technical Details: | BOM doc.NO. | | JSW/05/2022/0170b |
| External diameter of outlet hole \varnothing 80 mm provide connector pipe product. | | | |

ARTICLE NAME: WALL HUNG WC



TECHNICAL DIMENSIONS

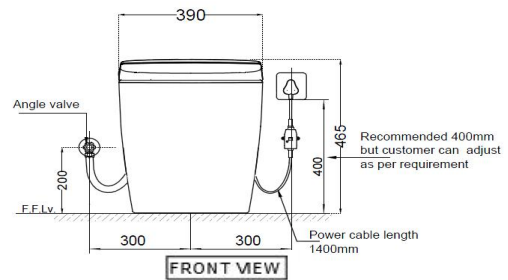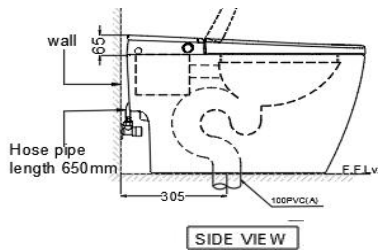

PRODUCT SPECIFICATION

| | | | |
|-------------------------------------|---|--------------------------------------|--|
| Dimension | 390x685x465 mm | Rear / Front shower water flow | 350-1000ml/Min |
| Material | White PP Seat Cover/ Ceramic Vitreous China | Heating mode | Instant heating |
| Flush Volume | Dule Flush-4.2/6 LPF | Adjustable water temperature | From 28°C-38°C |
| Net Weight | 48.5kg | General heater power | 1600W |
| Gross Weight | 54kg | Safety device | temperature Controller,NTC , |
| Pit Distance | 305 | Air speed | \geq 4m/s |
| Installation Mode | Floor standing | Air temperature | About from room temperature to 55°C |
| Water Inlet | Inlet pipe is left side | General heater power | 200W |
| Voltage | 220V-240V~, 50-60Hz | Safety device for Water Heater | Temperature controller,NTC and thermal |
| Power Cord Length | 1400 mm | Safety device for Seat | NTC and Thermal fuse |
| Water connection | Water pipe supply,G1/2thread | General heater power | 50W |
| Water pressure requirment | 0.7bar(dynamic)-7.5bar(static) | Rated power | 1100 W (5°C) |
| Water supply temperature requirment | 5-35°C | Environmental temperature requirment | 0-40°C |

FUNCTIONS/FEATURES

Adjustable Seat temperature, Dual Wash Function, Warm Air Dryer with Adjustable temperature, Adjustable water flow & temperature, Anti bacterial seat & nozzle, Remote Control, Instant Water heating, Auto deodorization, Night light,LED digital display,Spray Nozzle with Anti-bacteria and UV sterilization,Seat and cover Auto Open foot sensor.

ACCESSORIES PROVIDED

| | |
|--------------------------------|---------------|
| Electronic Bidet PP Seat Cover | ITS-WHT-89109 |
| toilet sealing ring | ZPS-WHT-1401 |
| Remote | ZPS-WHT-ST01A |
| Angle valve with filter | ZPS-WHT-ST59 |

CARE AND CLEANING GUIDELINES

- Vitreous china sanitary ware products are fragile in nature and need to be handled with care (to avoid personal injury) at all times during its storage, handling, installation and use thereafter.
- The product is heavy and it is recommended that two persons hold it while it is being fixed.
- Carefully inspect the new product for damage before installation.
- Risk of product damage. Over tightening may cause breakage or chipping of vitreous china.
- Risk of external leakage. Do not lift or rock the bowl after placement.
- Always test your cleaning solution on an inconspicuous area on the product before applying it to the entire surface.
- Do not allow cleaners to sit or soak on the product.
- Use a soft, dampened sponge or cloth to clean. Never use abrasive material like a bristle brush or scouring pad.
- Wipe surfaces clean and rinse completely with water immediately after applying cleaners.
- Clean Chrome, stainless steel surfaces once a week. Do not use cleaners containing chloride on chrome, stainless steel. If used, rinse the surface immediately to prevent corrosion.
- Wherever chrome plating is used on the products, use only warm water to clean and then dry with a soft cloth.

DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. All dimensions are in mm (Tolerance \pm 5 MM). Jaquar reserves the right to make the necessary amendments at any time without prior notice.