



STRIKER 6W


STRIKER ROUND DOWNLIGHT

Indoor Luminaire

Product Code:

LSTK01R006XC / LSTK01R006XN / LSTK01R006XW

6W - 360lm - 6500K - CRI>80 - Beam Angle 90°



Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	6W ± 10%
Rated Input Current	0.028 Amp (Nominal)
Power Factor	≥0.90
ATHD	<15%
Rated Luminous Flux	360 lm / 330 lm / 300 lm (tolerance as per BIS)
Rated Luminaire Efficacy	60 lm/W / 55 lm/W / 50 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80
Beam Angle	90° (within the permissible limits)
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	PC. housing
Lens / Reflector	PC. Diffuser
Mounting	Recess

Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

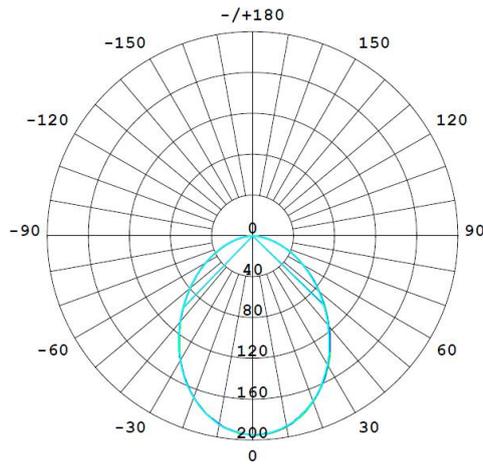


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	24.8	26.3	25.1	26.5	26.7	24.8	26.2	25.1	26.4	26.6	
3H	26.0	27.3	26.3	27.6	27.8	26.0	27.3	26.3	27.5	27.8	
4H	26.5	27.7	26.8	28.0	28.2	26.4	27.7	26.7	27.9	28.2	
6H	26.8	27.9	27.1	28.2	28.5	26.7	27.9	27.0	28.2	28.4	
8H	26.8	28.0	27.2	28.2	28.5	26.8	27.9	27.1	28.2	28.5	
12H	26.9	28.0	27.2	28.2	28.5	26.8	27.9	27.2	28.2	28.5	
4H	2H	25.3	26.6	25.6	26.8	27.1	25.3	26.6	25.6	26.8	27.1
3H	26.7	27.8	27.1	28.1	28.4	26.7	27.8	27.0	28.1	28.4	
4H	27.3	28.3	27.6	28.6	28.9	27.2	28.2	27.6	28.5	28.9	
6H	27.7	28.6	28.1	28.9	29.3	27.6	28.5	28.0	28.9	29.2	
8H	27.8	28.6	28.2	29.0	29.4	27.7	28.6	28.2	28.9	29.3	
12H	27.8	28.6	28.3	29.0	29.4	27.8	28.5	28.2	28.9	29.3	
8H	4H	27.5	28.3	27.9	28.6	29.0	27.4	28.3	27.8	28.6	29.0
6H	28.0	28.7	28.4	29.1	29.5	27.9	28.6	28.4	29.0	29.4	
8H	28.2	28.8	28.6	29.2	29.6	28.1	28.7	28.6	29.1	29.6	
12H	28.3	28.8	28.7	29.2	29.7	28.2	28.7	28.7	29.2	29.6	
12H	4H	27.5	28.2	27.9	28.6	29.0	27.4	28.2	27.9	28.6	29.0
6H	28.0	28.6	28.5	29.0	29.5	28.0	28.6	28.4	29.0	29.4	
8H	28.2	28.7	28.7	29.2	29.7	28.2	28.7	28.6	29.1	29.6	
Variations with the observer position at spacings (CIE Pub.117) :											
s = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
1.5H	+ 0.1 / - 0.3					+ 0.1 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4					

Product Dimensions (Dia.x H), Cutout (Dia.)

Ø108 x 62mm (Tol. ± 5 mm), Cutout Size Ø83mm

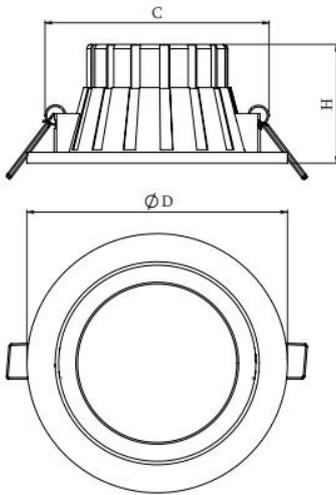

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.