


PEARL PLUS 15W

PEARL PLUS ROUND DOWNLIGHT

Indoor Luminaire

Product Code:

LPPS01R015XC/ LPPS01R015XN/ LPPS01R015XW
 LPPS01R015XB / LPPS01R015XG / LPPS01R015XP
 LPPS01R015XR / LPPS01R015XV
 15W - 1425lm- 6500K - CRI>80 - Beam Angle - 106°




Technical Specifications

Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	15W ± 10%
Rated Input Current	0.068 Amp (Nominal)
Power Factor	≥0.90
THD	<15%
Rated Luminous Flux	1425 lm / 1350 lm / 1275 lm (tolerance as per BIS)
Rated Luminaire Efficacy	95 lm/W / 90 lm/W / 85 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K / Blue / Green / Pink / Red / Violet (tolerance as per ANSI)
Beam Angle	106° (within the permissible limits)
Color Rendering Index (CRI)	>80 Ra
Driver Efficiency	≥80%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	PC. Housing
Lens / Reflector	PC. Diffuser
Mounting	Recessed

Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

Light Distribution

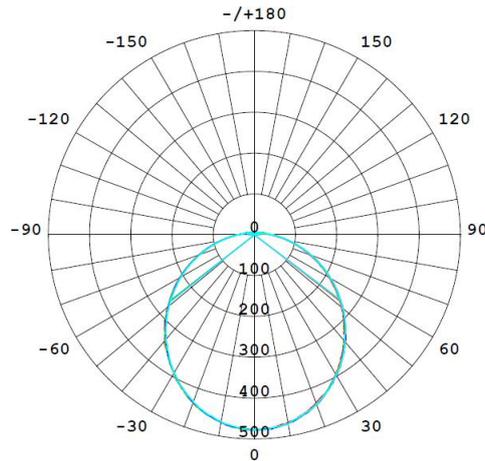


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.3	17.8	16.6	18.1	18.3	16.3	17.8	16.7	18.1	18.4
3H	18.0	19.4	18.4	19.7	20.0	18.1	19.5	18.5	19.8	20.1
4H	18.8	20.1	19.2	20.5	20.8	18.9	20.3	19.3	20.6	20.9
6H	19.6	20.8	20.0	21.2	21.5	19.7	21.0	20.1	21.3	21.7
8H	19.9	21.2	20.3	21.5	21.9	20.1	21.3	20.5	21.7	22.0
12H	20.3	21.5	20.7	21.9	22.3	20.5	21.7	20.9	22.0	22.4
4H 2H	16.9	18.3	17.3	18.6	18.9	17.0	18.3	17.4	18.6	19.0
3H	18.9	20.0	19.3	20.4	20.8	19.0	20.1	19.4	20.5	20.9
4H	19.8	20.9	20.3	21.3	21.7	19.9	21.0	20.4	21.4	21.8
6H	20.8	21.7	21.2	22.2	22.6	20.9	21.9	21.4	22.3	22.7
8H	21.2	22.1	21.7	22.6	23.0	21.4	22.3	21.8	22.7	23.2
12H	21.7	22.5	22.2	23.0	23.5	21.9	22.7	22.4	23.1	23.6
8H 4H	20.2	21.1	20.7	21.6	22.0	20.3	21.2	20.8	21.7	22.1
6H	21.4	22.1	21.9	22.6	23.1	21.5	22.3	22.0	22.7	23.2
8H	22.0	22.7	22.5	23.2	23.7	22.1	22.8	22.7	23.3	23.8
12H	22.7	23.2	23.2	23.8	24.3	22.8	23.4	23.3	23.9	24.5
12H 4H	20.3	21.1	20.8	21.6	22.1	20.4	21.2	20.9	21.7	22.1
6H	21.5	22.2	22.1	22.7	23.2	21.6	22.3	22.2	22.8	23.3
8H	22.2	22.8	22.8	23.3	23.9	22.4	22.9	22.9	23.4	24.0
Variations with the observer position at spacings (CIE Pub.117) :										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.1 / - 0.3				

Product Dimensions (DiaxH)

Ø140 x 65 (Tol. ± 5 mm), Cutout Size Ø45mm

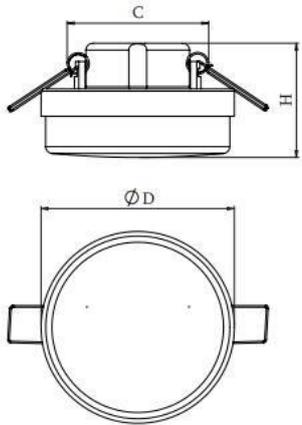

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.