
jaquar.com Document No. SNW/ZPS/24/VB02N





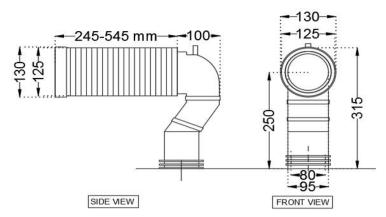

General Information	
Product Code	ZPS-WHT-VB02N
Brand	Jaquar
Colour	White
Туре	P-trap to S-trap Conversion Bend
Material	ABS(Acrylonitrile Butadiene Styrene) Plastic
Product Specification	
Product Dimension	345x130x315mm
Product Net Weight	425 Gram
Product Gross Weight	500 gram
Trap distance	flexibility: 245-545mm
Inlet And Outlet Hole Dimension	Inlet diameter : 95 +2/-2mm
	Outlet diameter : 130 +2/-2mm
Product Feature	Conversion bends can be used to connect solvent weld waste pipes and fittings to push-fit waste pipes and fittings, and vice versa.
ACCESSORIES PROVIDED	
PP & Rubber Upper Gasket	

CARE AND CLEANING GUIDELINES

Rubber Lower Gasket

Fixing kit

— Vitreous china sanitary ware products are fragile in nature and need to be handled with care (to avoid personal injury) at all times during its storage, handling, installation and use thereafter.

1 Long Threaded Rod, 1 Fixing Plate, 4 Screw, 4 Sleeeve, 2 Washers, 2 Nut.

- ¬ The product is heavy and it is recommended that two persons hold it while it is being fixed.
- ¬ Risk of product damage. Over tightening may cause breakage or chipping of vitreous china.
- ¬ Risk of external leakage. Do not lift or rock the bowl after placement.
- ¬ Always test your cleaning solution on an inconspicuous area on the product before applying it to the entire surface.
- \neg Do not allow cleaners to sit or soak on the product.
- \neg Use a soft, dampened sponge or cloth to clean. Never use abrasive material like a bristle brush or scouring pad.
- ¬ Wipe surfaces clean and rinse completely with water immediately after applying cleaners.
- ¬ Clean Chrome, stainless steel surfaces once a week. Do not use cleaners containing chloride on chrome, stainless steel. If used, rinse the surface immediately to prevent corrosion.
- \neg Wherever chrome plating is used on the products, use only warm water to clean and then dry with a soft cloth.

QUALITY MANAGEMENT SYSTEM - ISO 9001



DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/or countries. All dimensions are in mm (Tolerance ± 5 MM). Jaquar reserves the right to make the necessary amendments at any time without prior notice.