




INSTALLATION GUIDE






ALD-065M_Concealed Body for Single Lever Diverter 40mm Cartridge



***Representative
Image**

Requirements:-

- 1) **Pressure** :- 3 bar to 4 bar (Ideal Working Pressure)
- 2) **Pipe Lines** :- 2 lines for hot & cold inlet (15 mm/ 1/2" BSPP)
(Hot & Cold water pressure to be balanced for optimum results.)
- 3) **Installation** :- In wall Concealed

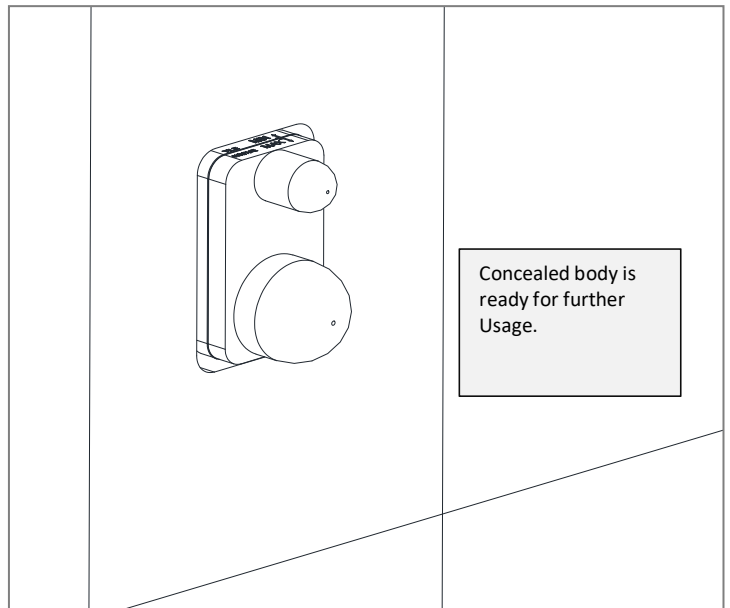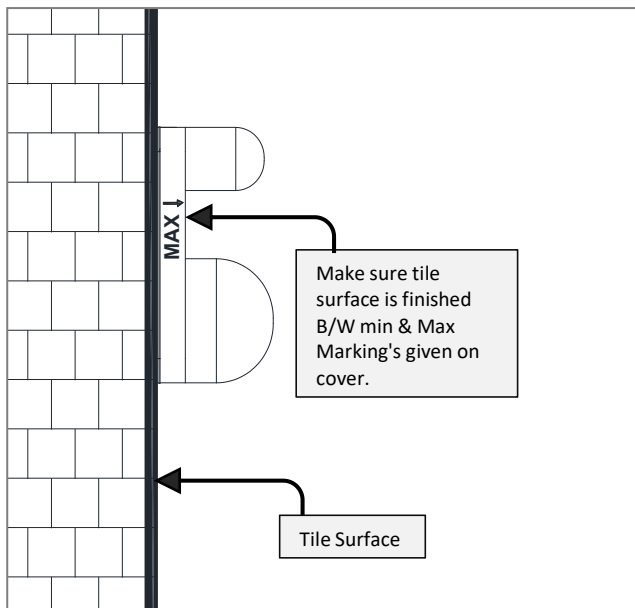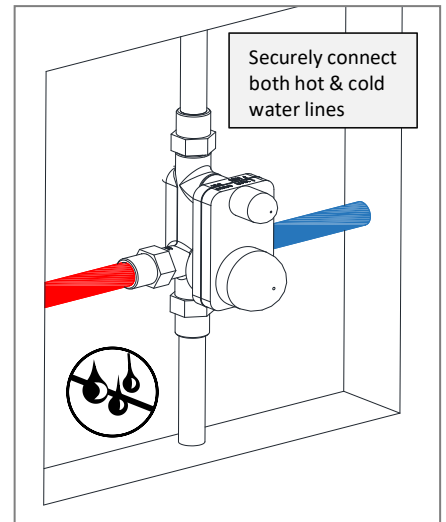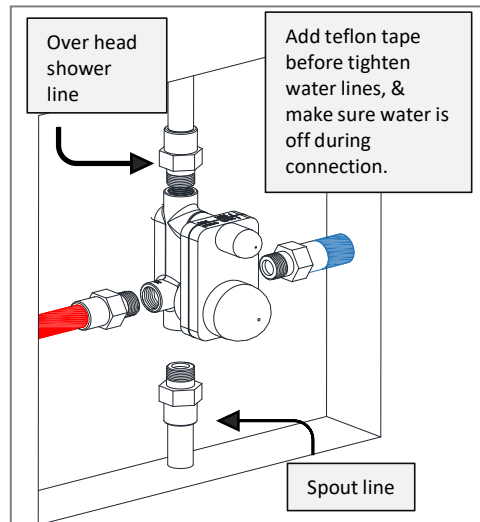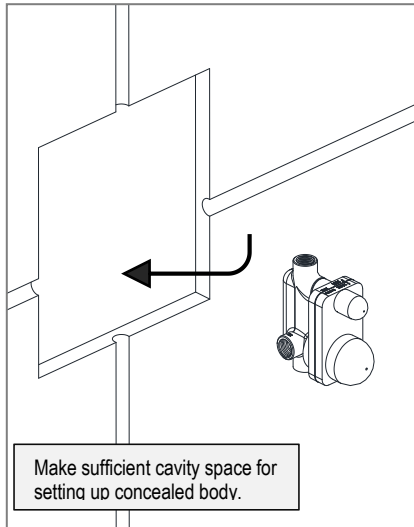

Safety Tips :-

- ❖ Make sure no loose fitting, Check for Leakage during water fittings.
- ❖ Keep water connection off during connection, avoid bending or twisted condition in pipes.
- ❖ Maintain desire water pressure to get conventional output.
- ❖ Don't use any metal/hard bristle scrub while cleaning .
- ❖ Don't push fittings forcefully, can lead to damage or crack.

**Note: THIS INSTALLATION METHOD CAN ALSO BE REFFERED FOR
ALD-055N, ALD-079N, ARC-87065C, CONNECTION SIZE (THREAD SIZE)
NEED TO VALIDATE ACCORDING TO PART NUMBER.**