




Aquamax Exposed Part Kit of Thermostatic Shower Mixer (Compatible with ALD-661N)

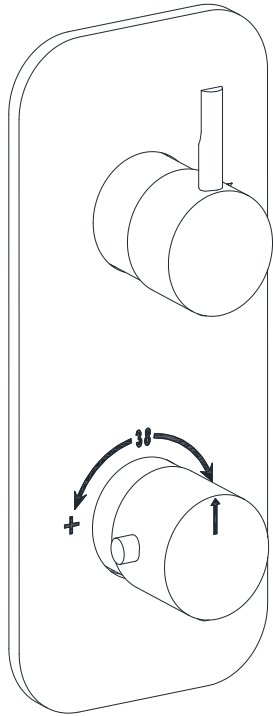



* Representative image

Temp & water pressure Requirement.

	Working Pressure: 1~3 bar
	Required Temperature: 5-65°C

- **Working Pressure:-**The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.

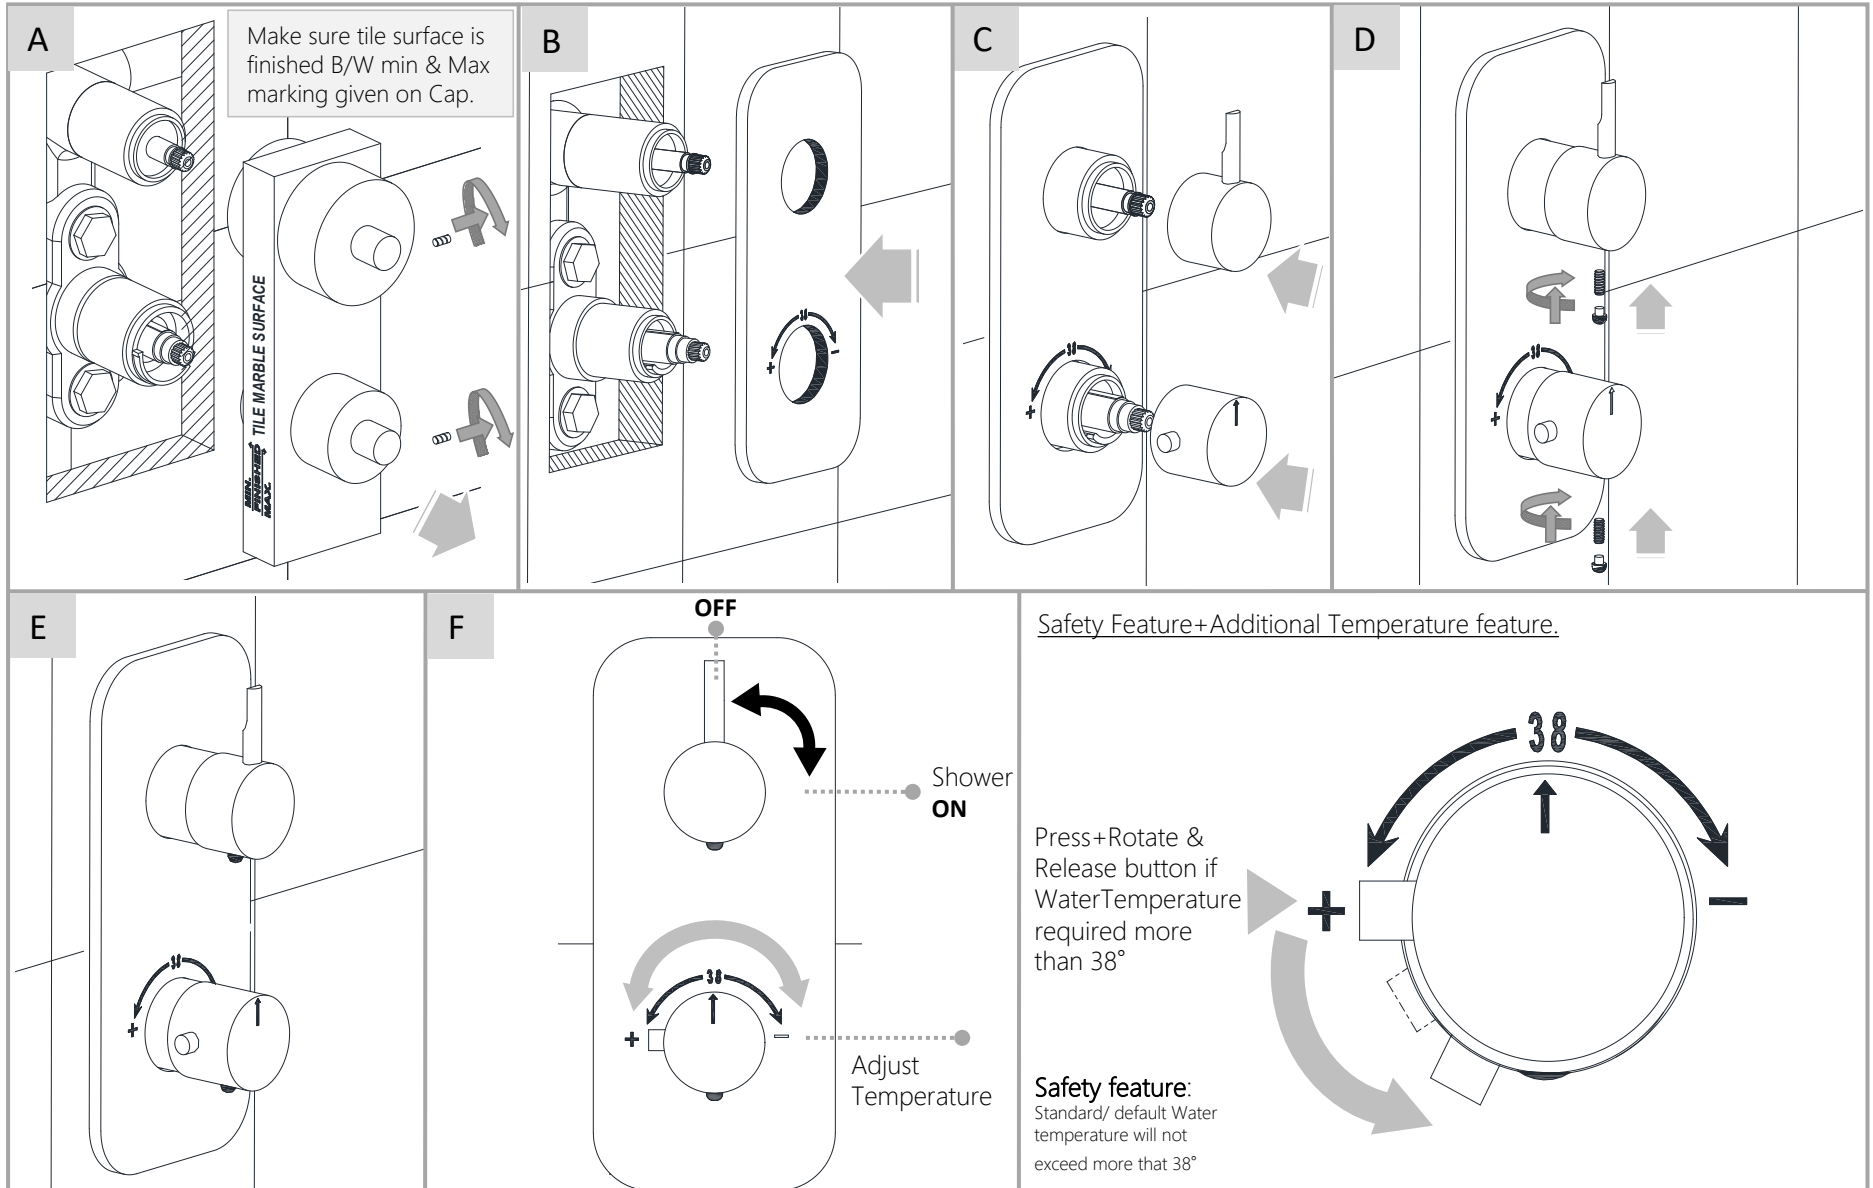

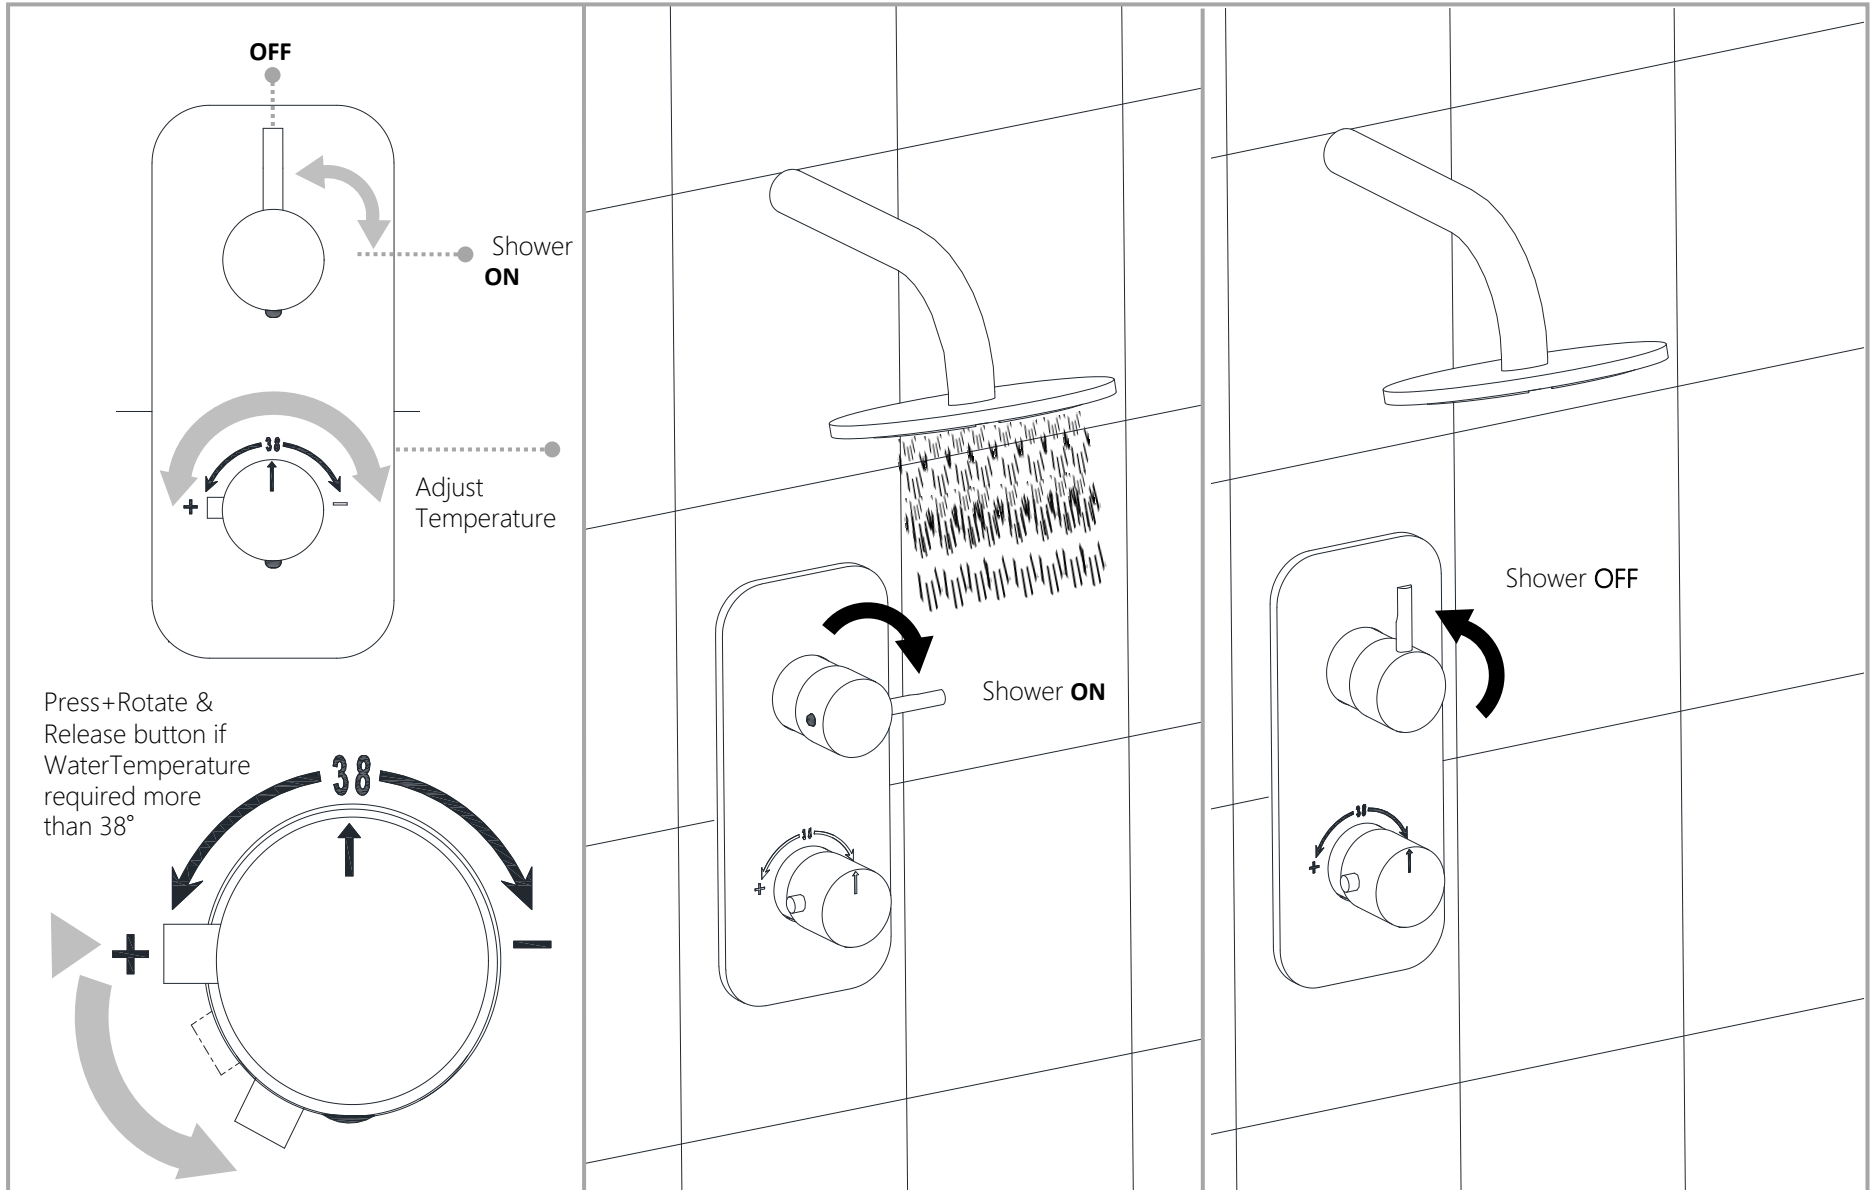


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL AQUAMAX EXPOSED PART KIT OF THERMOSTATIC SHOWER MIXER COMPATIBLE WITH ALD-661N.




Note: Apply liquid soap pH-B/W 5~7 or Glitz .


Apply soft cotton cloth

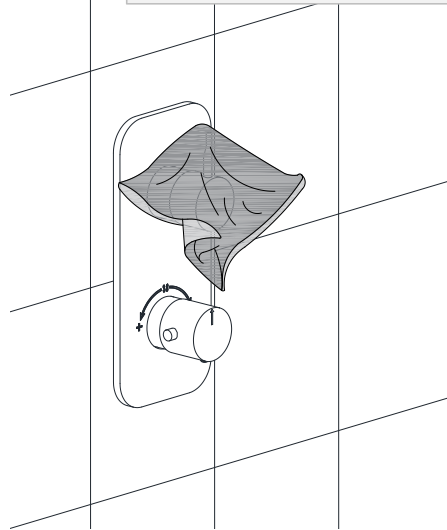

Apply soft cotton cloth

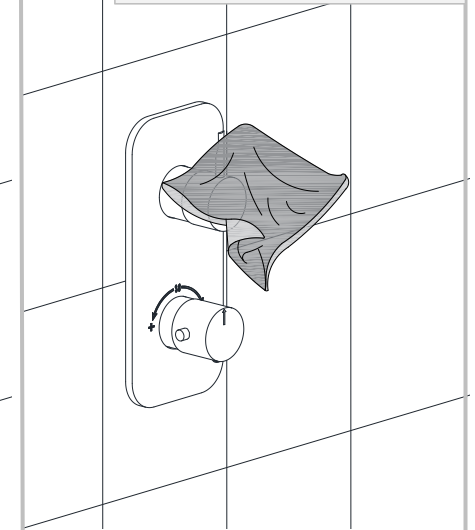


⊗ DON'T

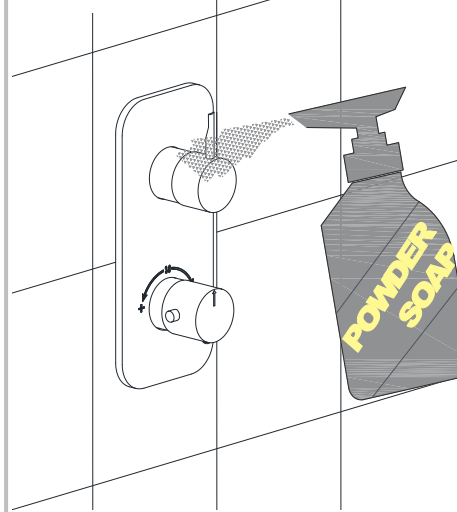


⊗ DON'T

Don't apply Scrub

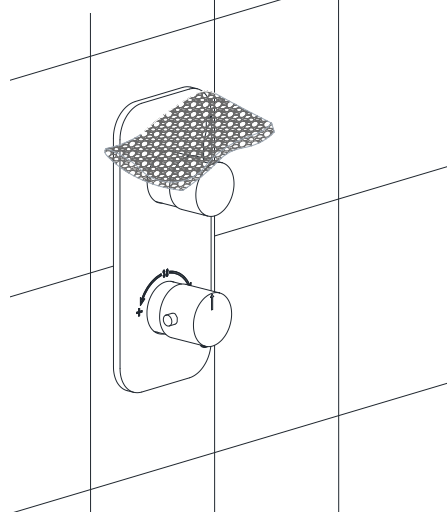

Steps & Cleaning agents requirements for Cleaning.

Recommended Cleaning:-Twice a week.

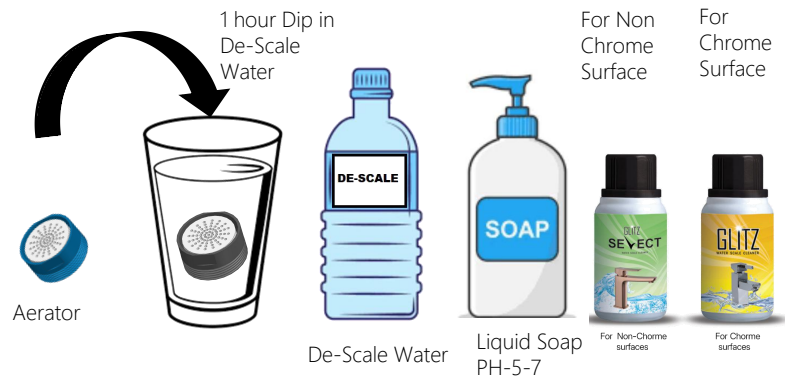

Note: Aerator Cleaning is not applicable for This Product.