




Aquamax Exposed Part Kit of Thermostatic Shower Mixer with 2-way diverter

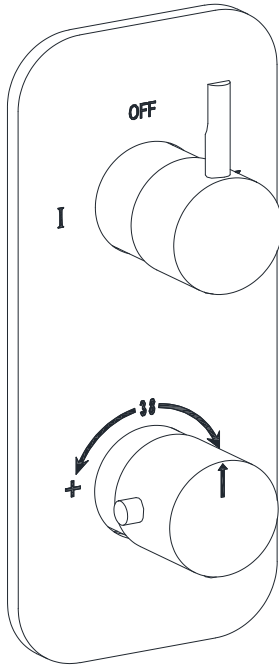


* Representative image

Note: This installation sheet can be "Referred for" **Aquamax Exposed Part Kit of Thermostatic Shower Mixer with 2-way diverter**, images & shape of product may vary according to product design & part code.


Temp & water pressure Requirement.

	Working Pressure: 1~3 bar
	Required Temperature: 5-65°C



- **Working Pressure:-** The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.

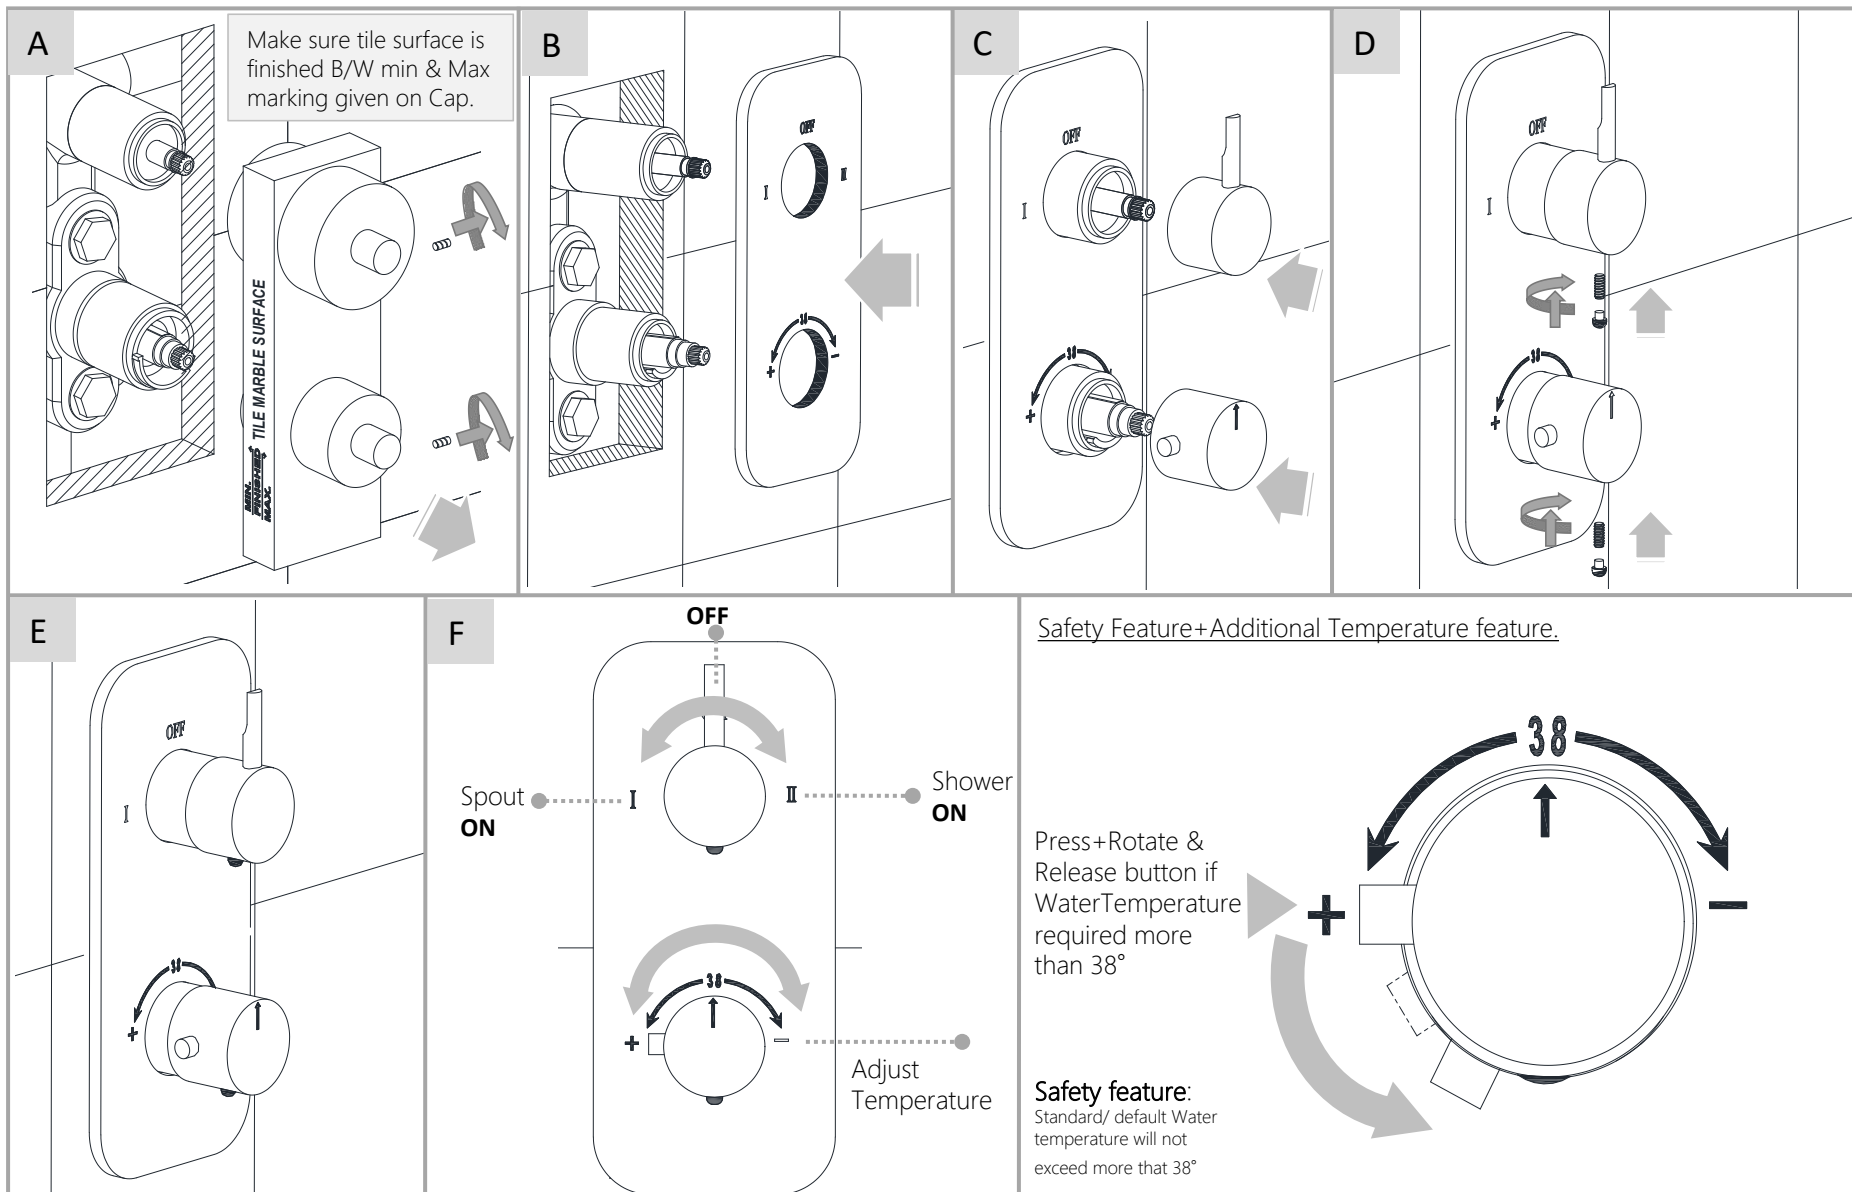

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL AQUAMAX PART KIT OF THERMOSATIC SHOWER MIXER WIT 2-WAY DIVERTER.

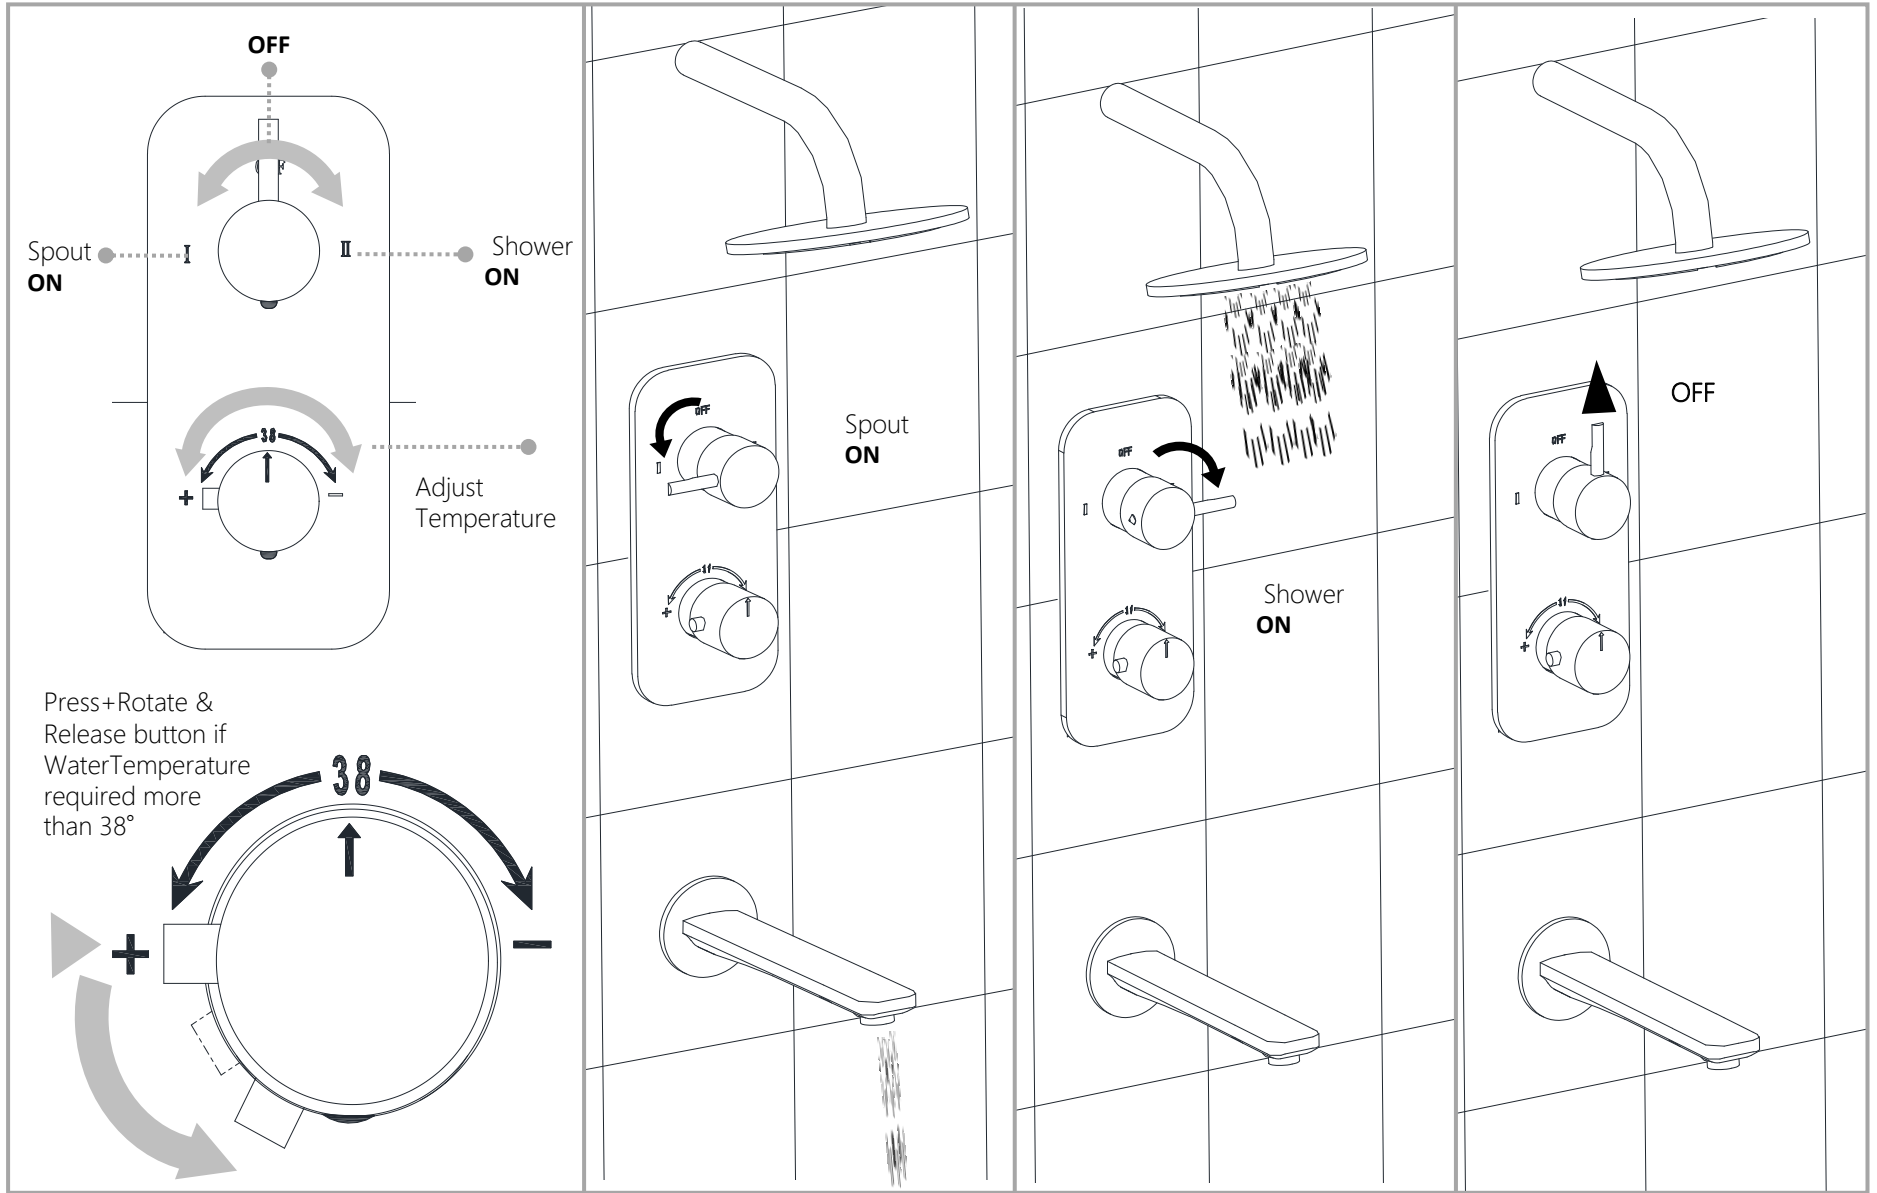


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL AQUAMAX PART KIT OF THERMOSATIC SHOWER MIXER WIT 2-WAY DIVERTER.

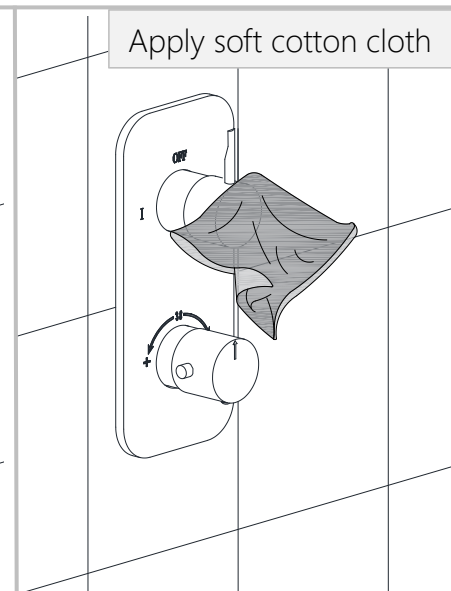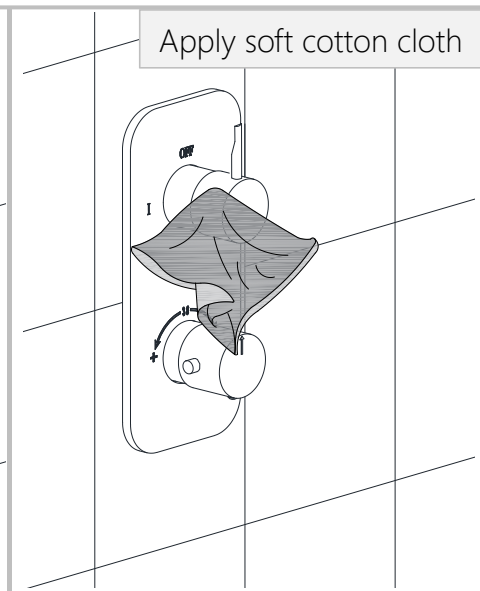

Steps & Cleaning agents requirements for Cleaning.

Recommended Cleaning:-Twice a week.

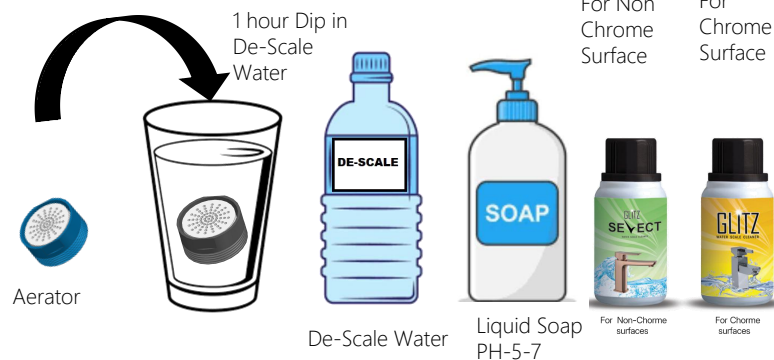

Note: Aerator Cleaning is not applicable for This Product.