




Aquamax Exposed Part Kit of Thermostatic Shower Mixer with 3-way diverter (Compatible with ALD-683N)

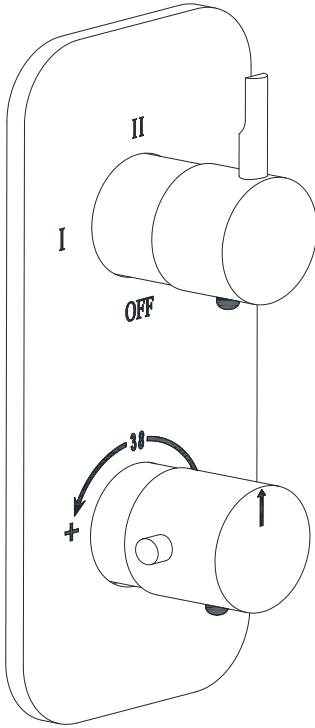


* Representative image

Temp & water pressure Requirement.


	Working Pressure: 1~3 bar
	Required Temperature: 5-65°C

- **Working Pressure:-**The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.




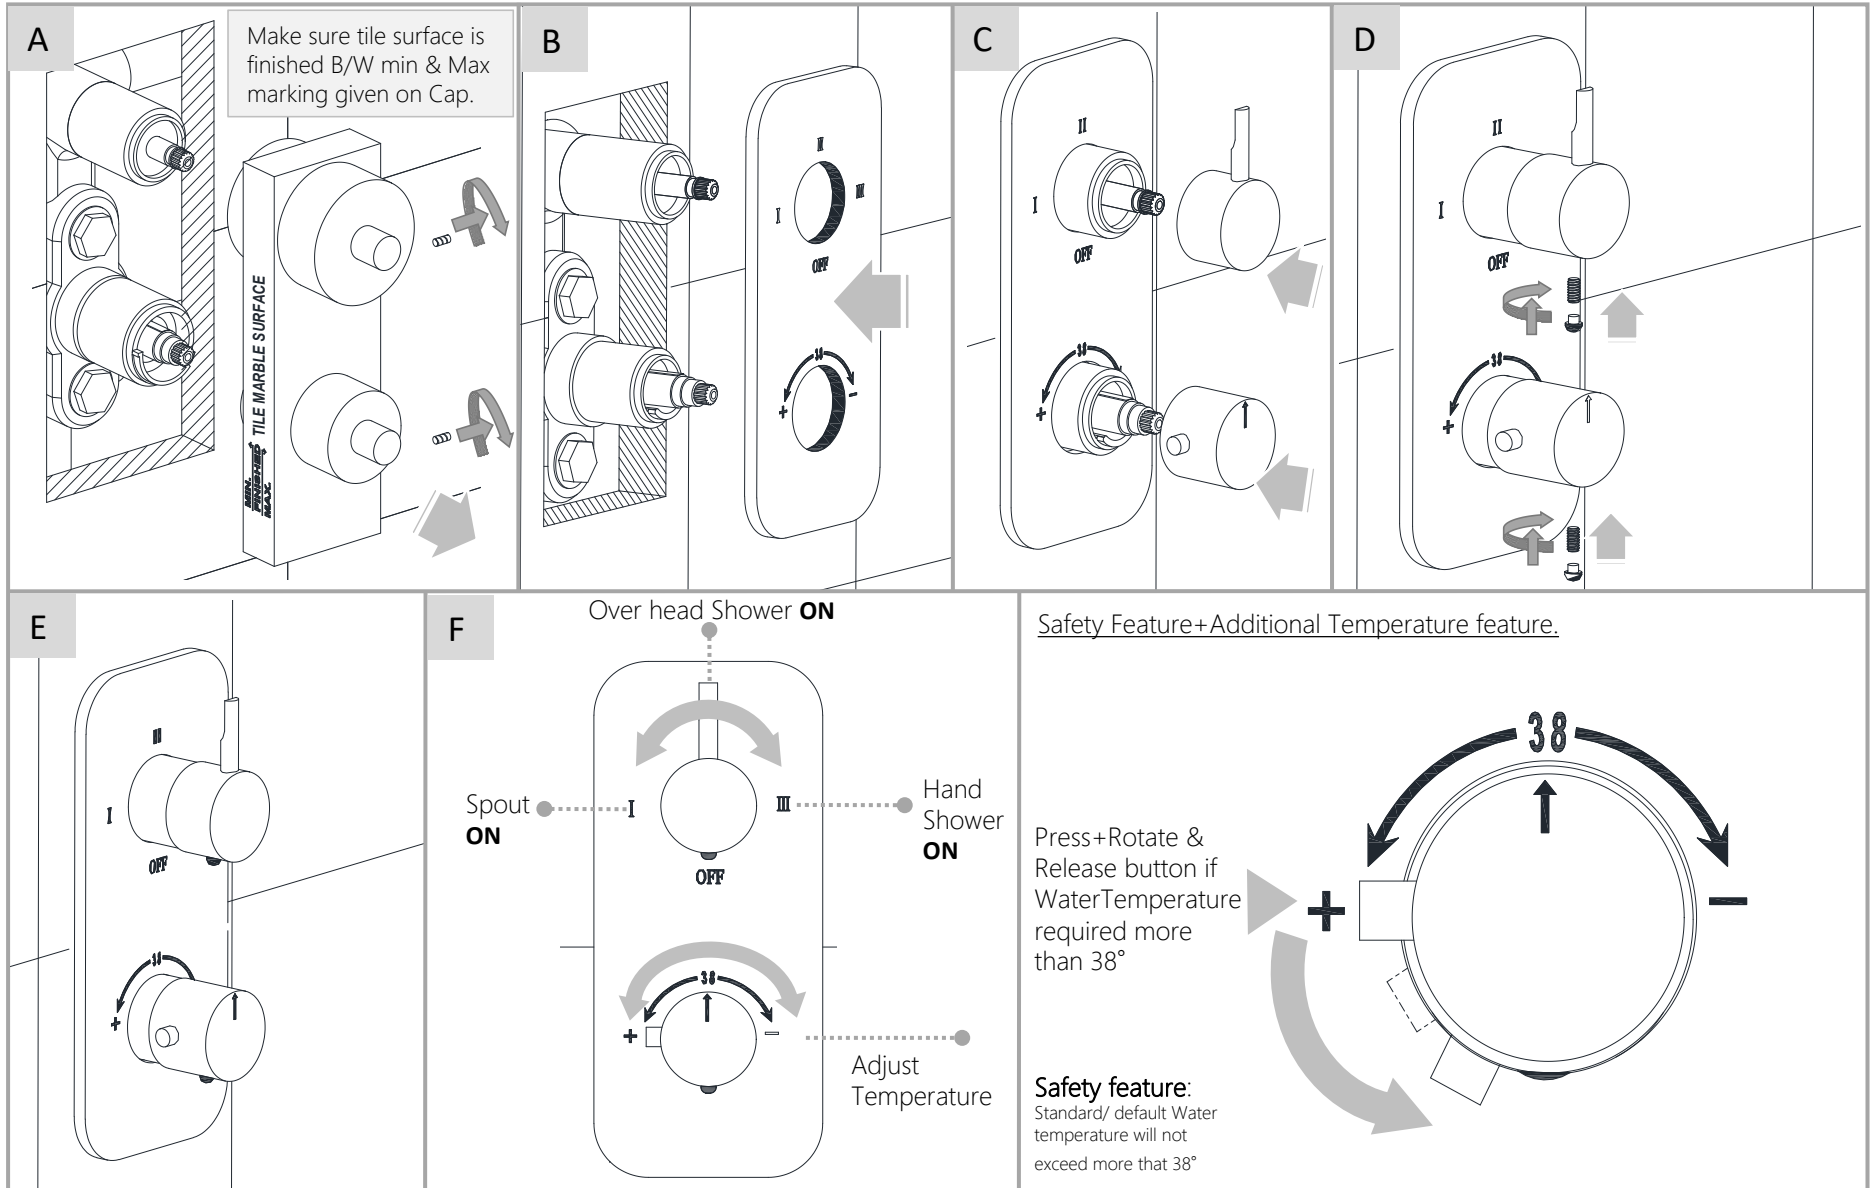


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL AQUAMAX EXPOSED PART KIT OF THERMOSTATIC SHOWER MIXER WITH 3 WAY DIVERTER. COMPATIBLE WITH ALD-683N

HOW TO OPERATE

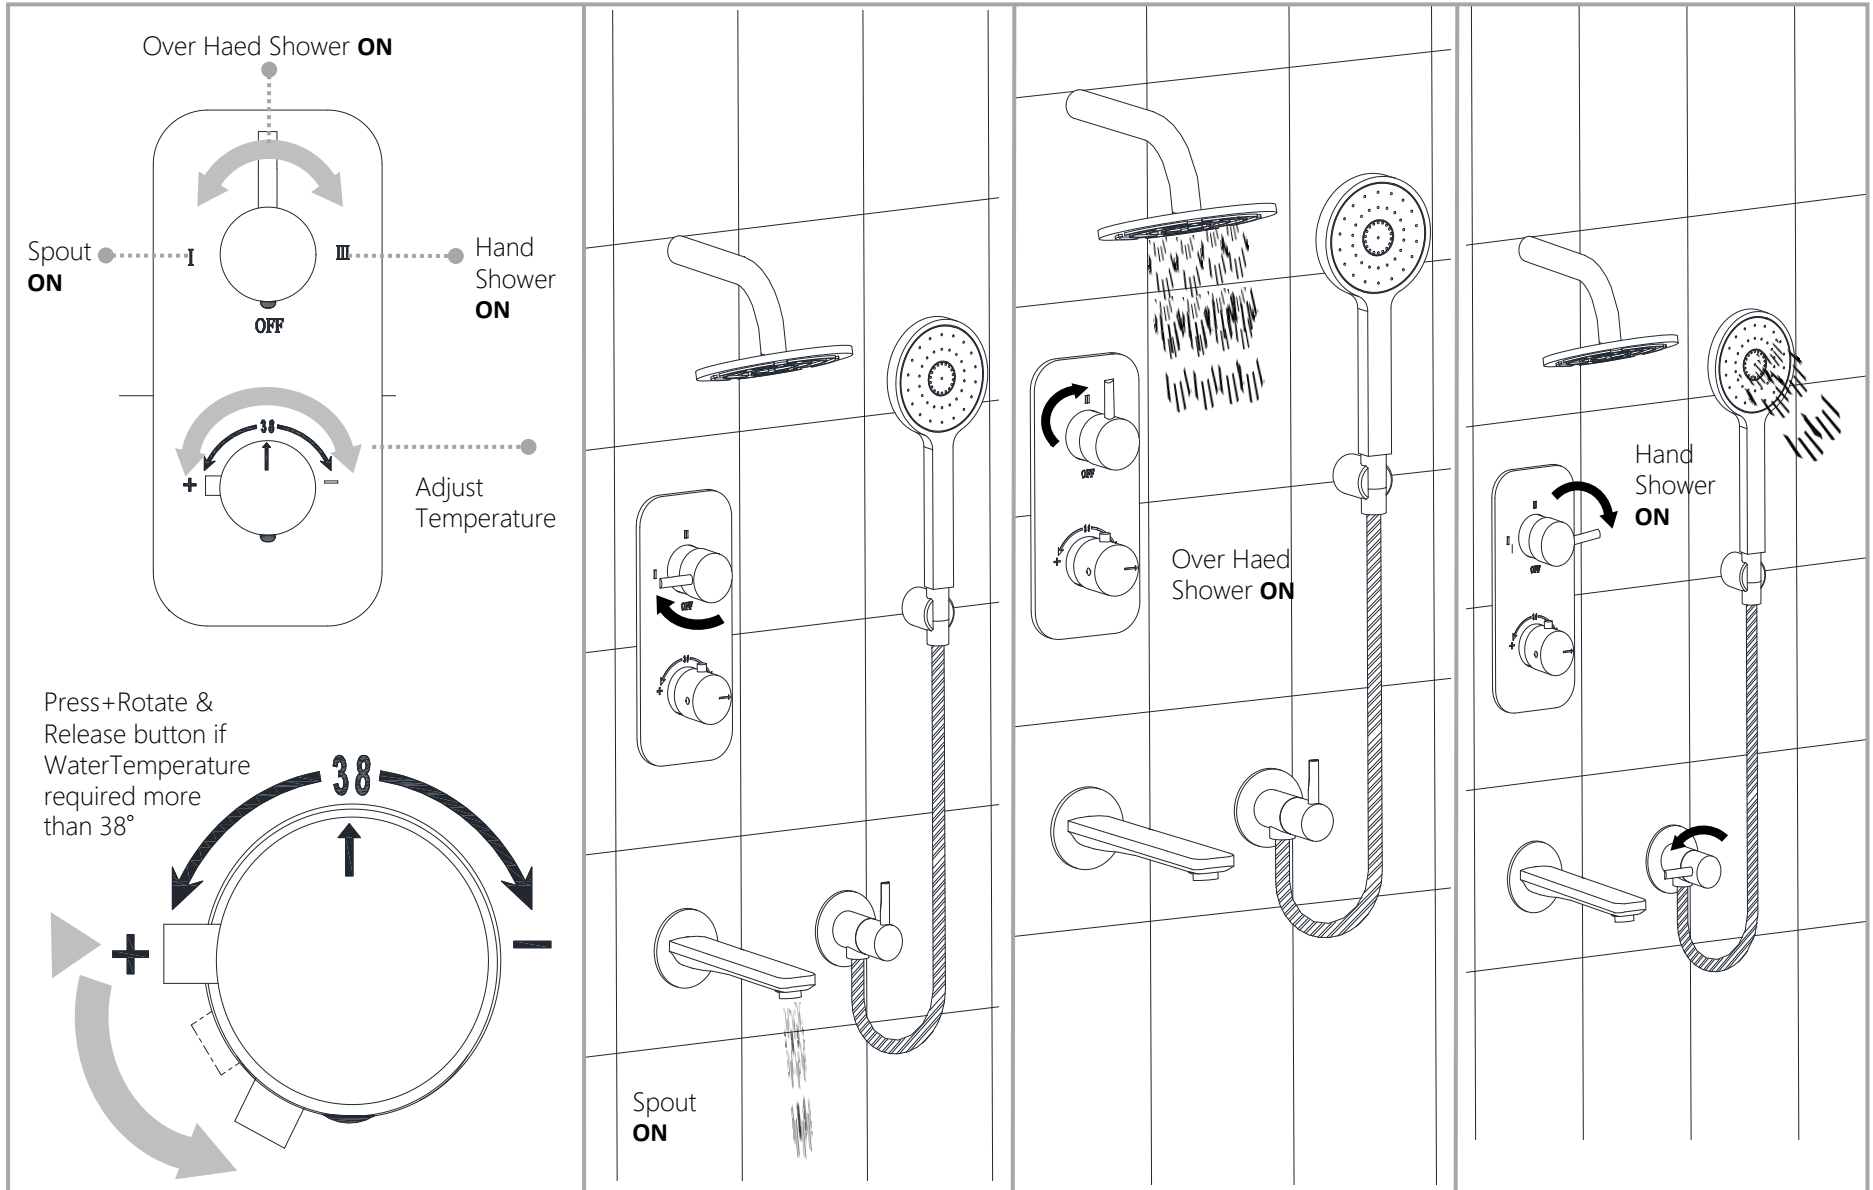


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL AQUAMAX EXPOSED PART KIT OF THERMOSTATIC SHOWER MIXER WITH 3 WAY DIVERTER. COMPATIBLE WITH ALD-683N

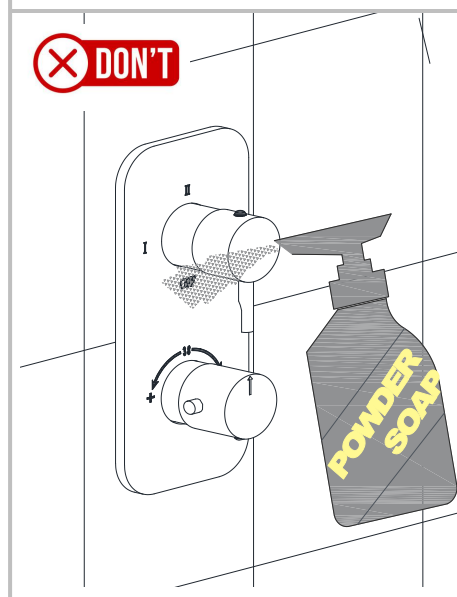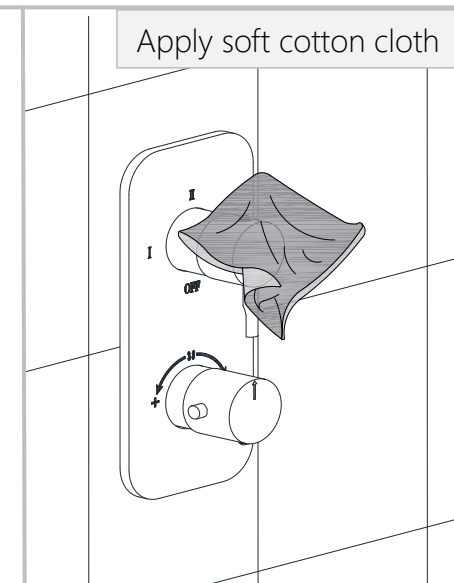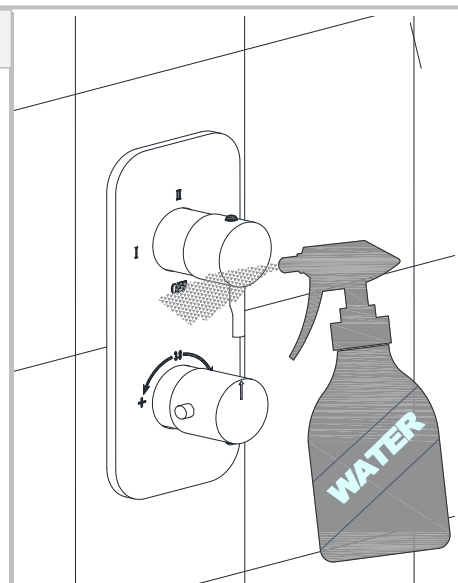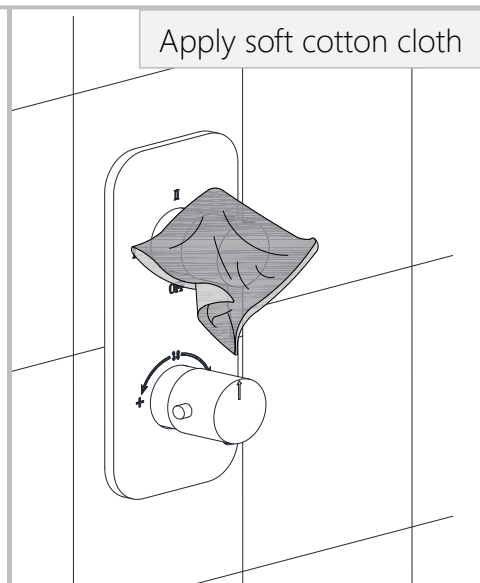

Steps & Cleaning agents requirements for Cleaning.

Recommended Cleaning:- Twice a week.

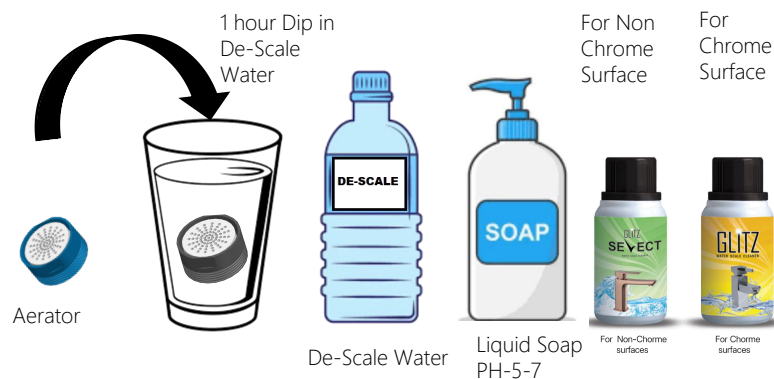

Note: Aerator Cleaning is not applicable for This Product.