




Single Lever Exposed Parts Kit of Hi-flow Diverter

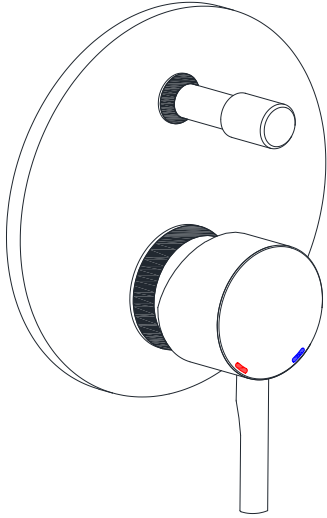


* Representative image

Temp & water pressure Requirement.


	Working Pressure: 1~3 bar
	Required Temperature: 5-65°C

- **Working Pressure:-**The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.



Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER EXPOSED KIT OF HIGH-FLOW DIVERTER.

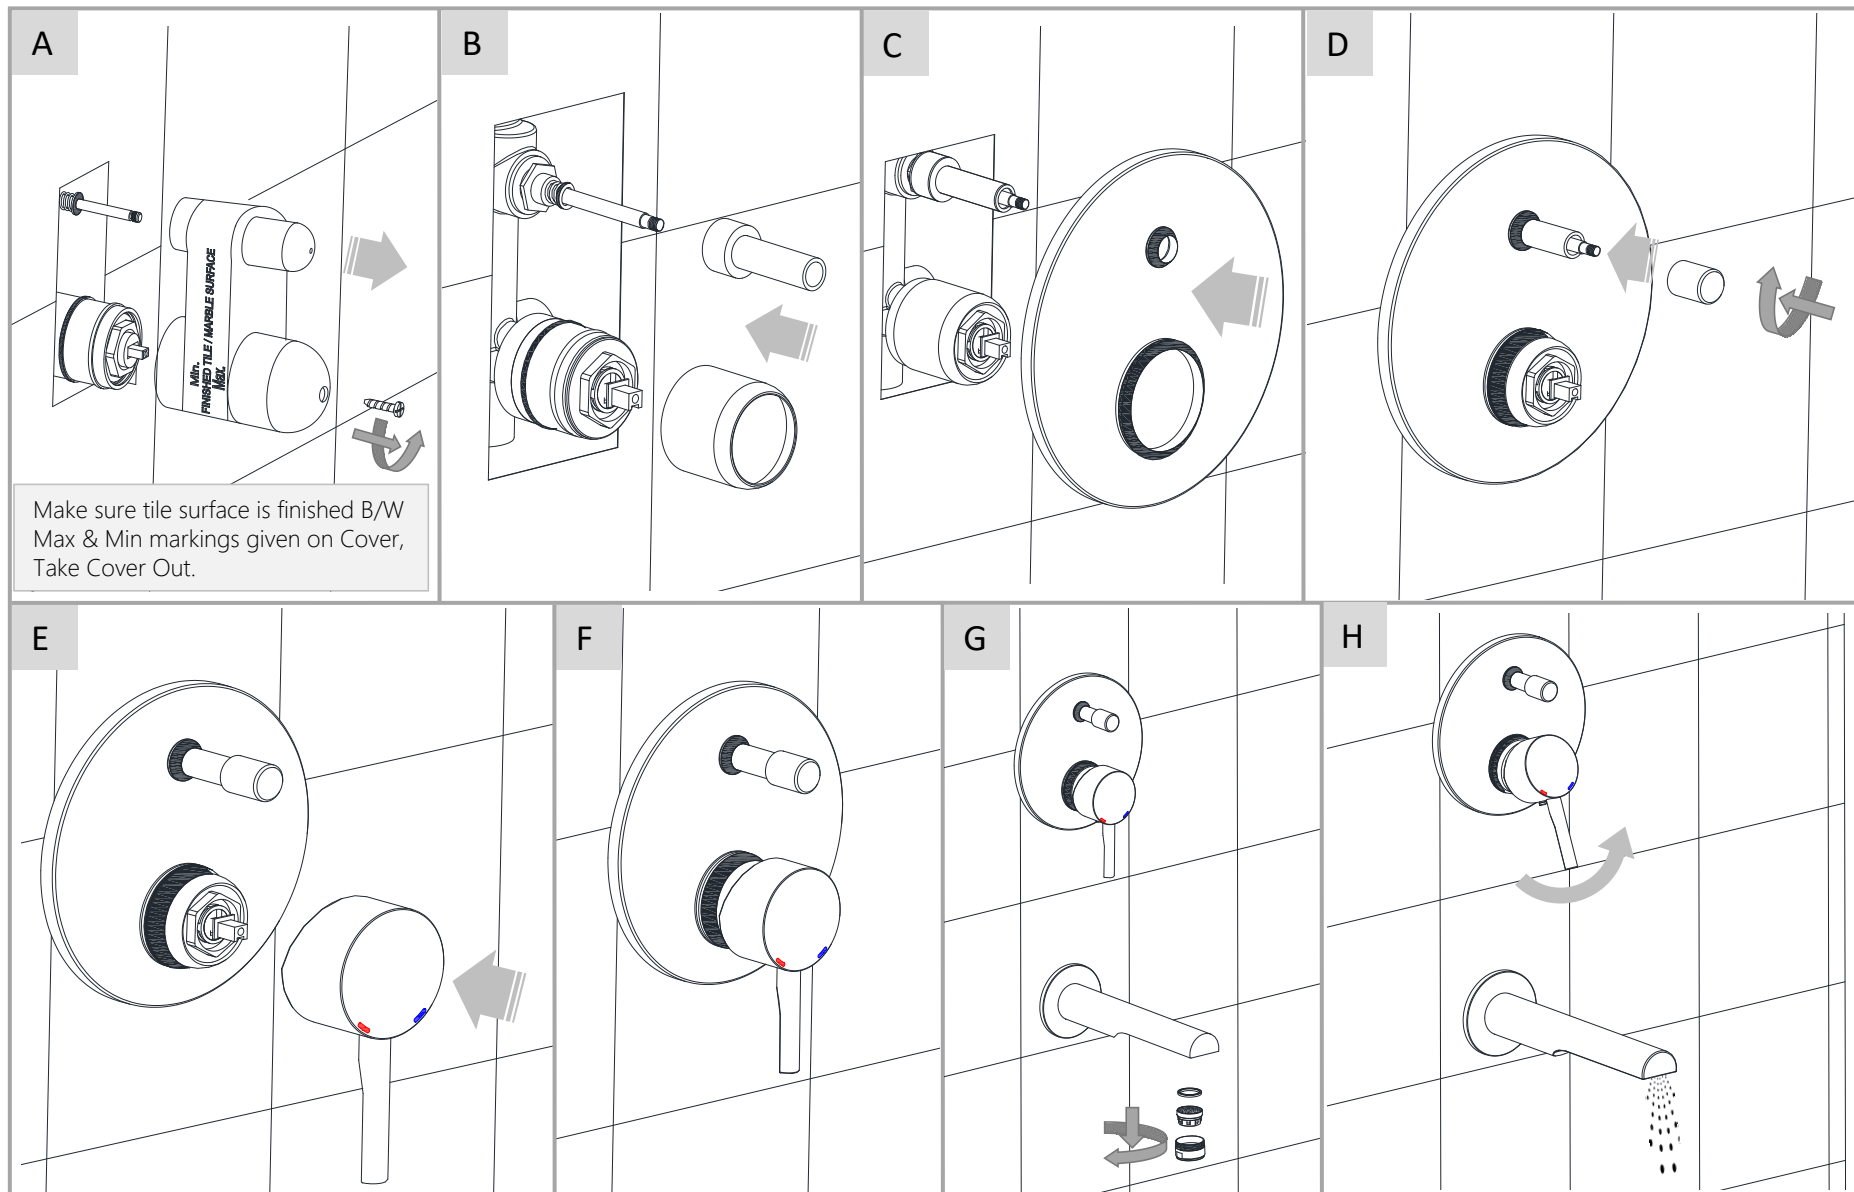


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER EXPOSED KIT OF HIGH-FLOW DIVERTER.

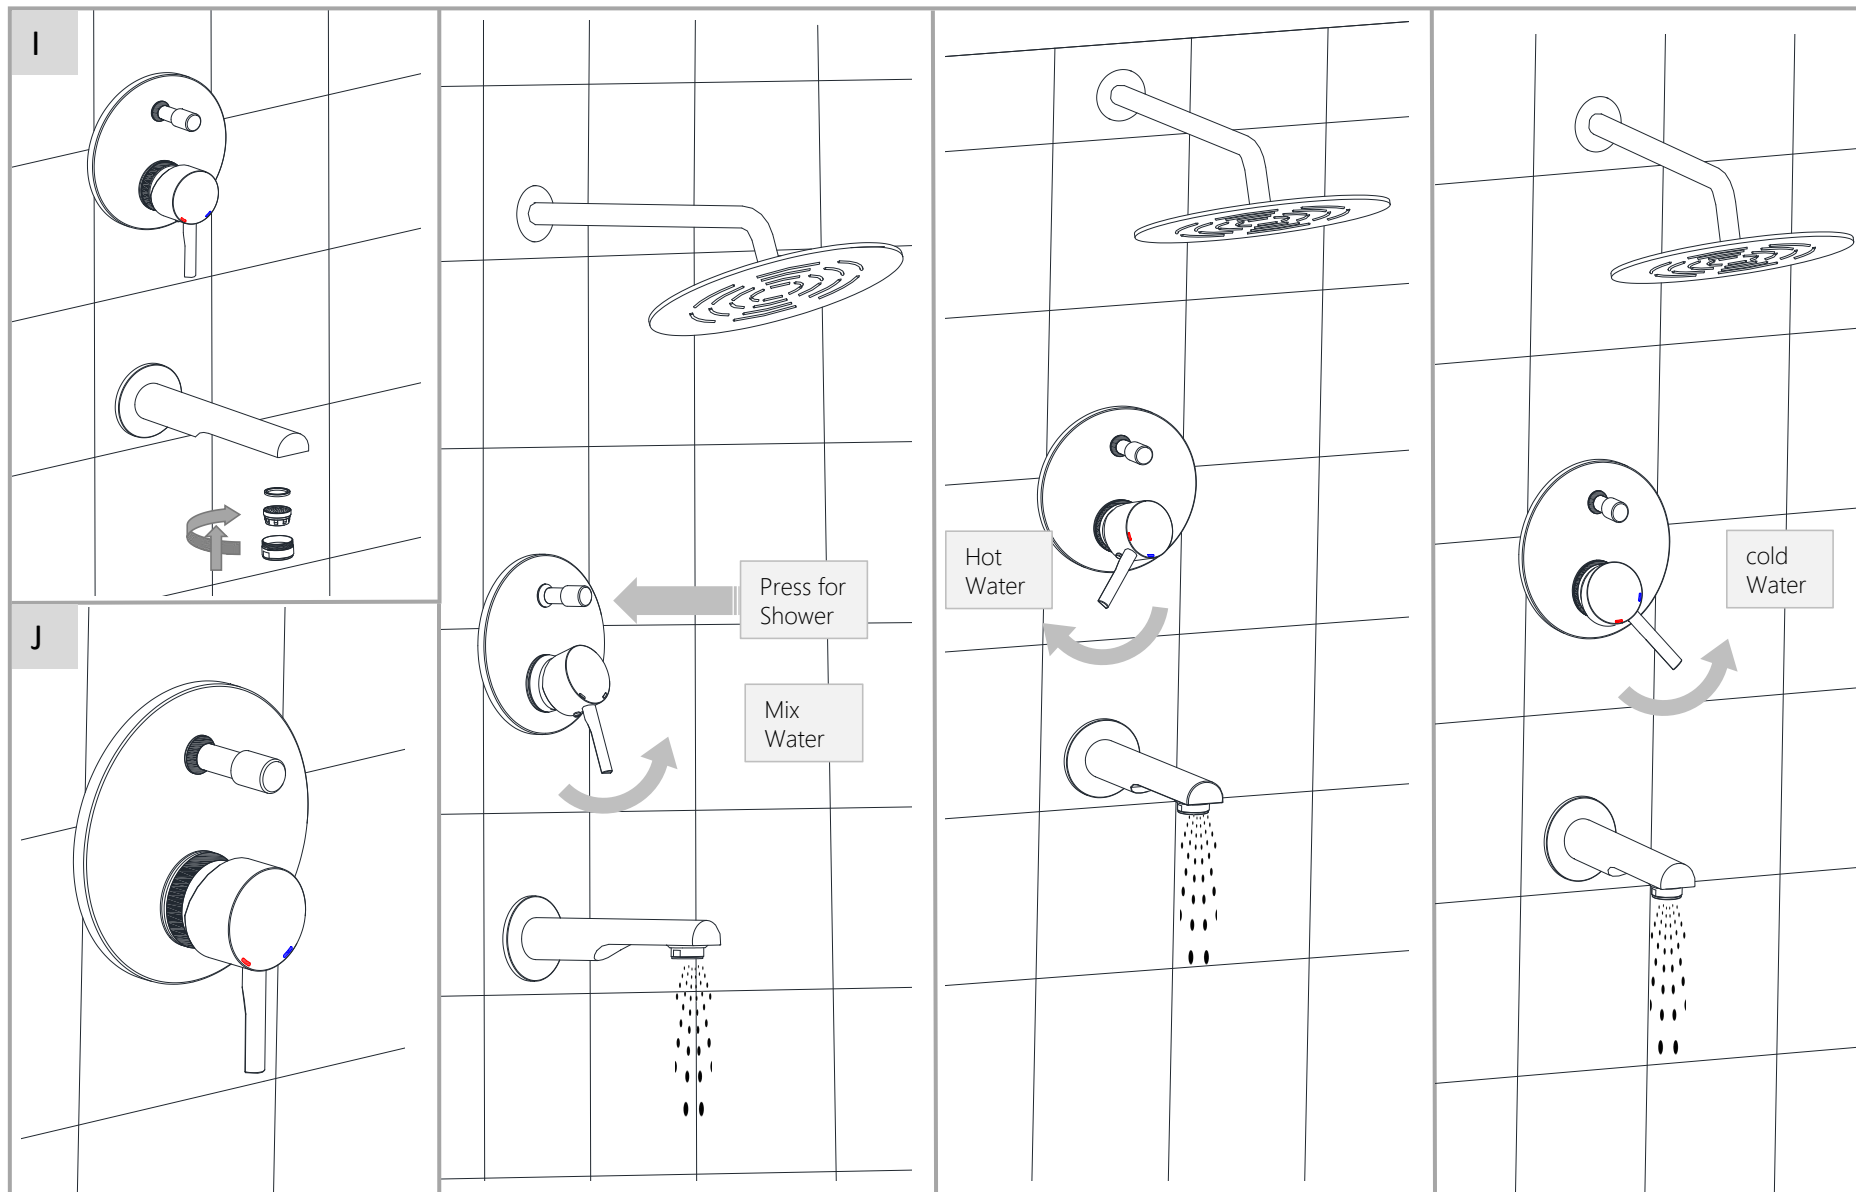

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER EXPOSED KIT OF HIGH-FLOW DIVERTER.

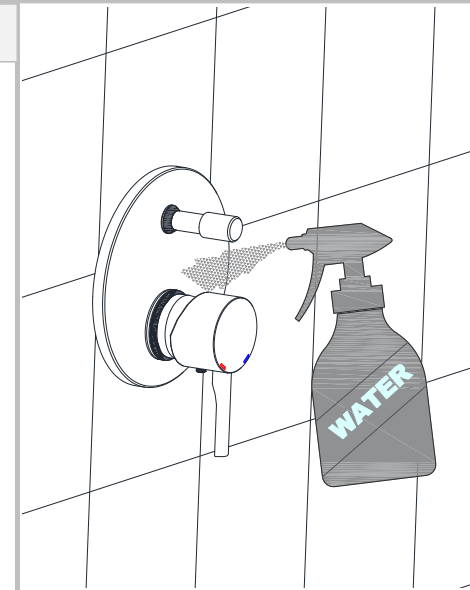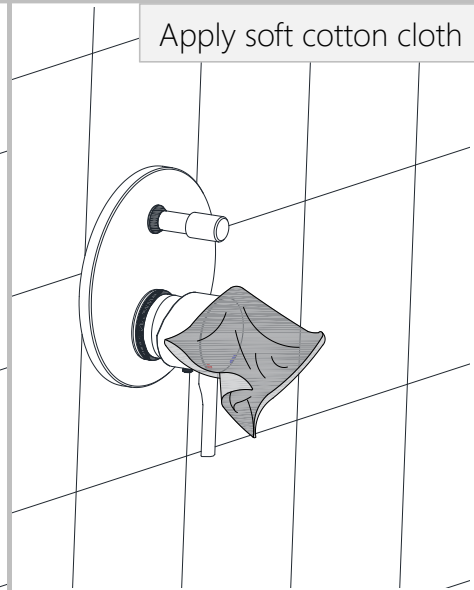

Steps & Cleaning agents requirements for Cleaning.

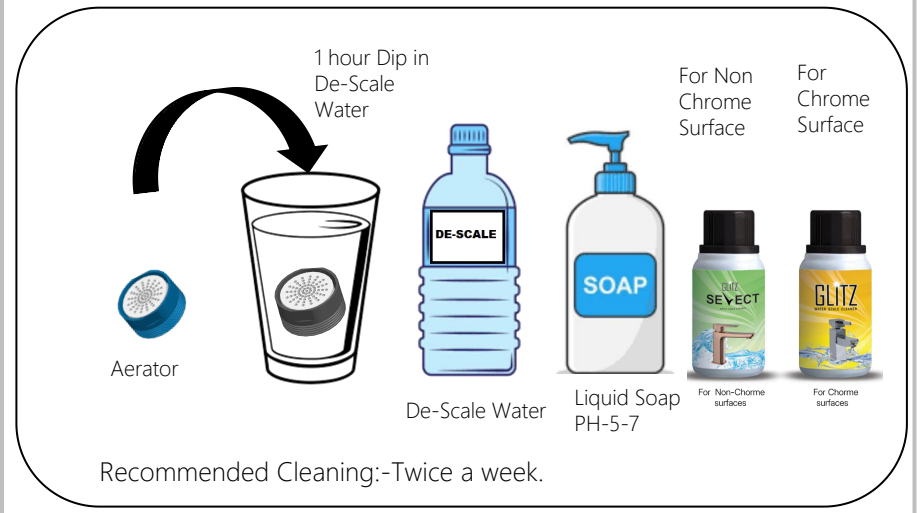

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE LEVER EXPOSED KIT OF HIGH-FLOW DIVERTER.