



INSTALLATION GUIDE


NOTE: THIS INSTALLATION SHEET CAN BE REFERRED FOR ALL OVER HEAD SHOWER HAND SHOWER WITH CONNECTION SIZE OF BSPP 1/2" SINGLE INLET TYPE.

Requirements:-


Wrench for fitting & tightening if required.

- ◆ 1. Pressure : - 1–3 Bar (Ideal Working Pressure)
- 2. Inlet supply : - BSPP/G1/2"
- ◆ 3. Operation : - Single Function/ Multi Function





Overhead Showers

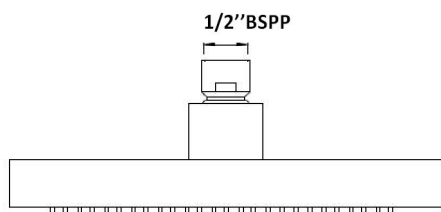

Single Function

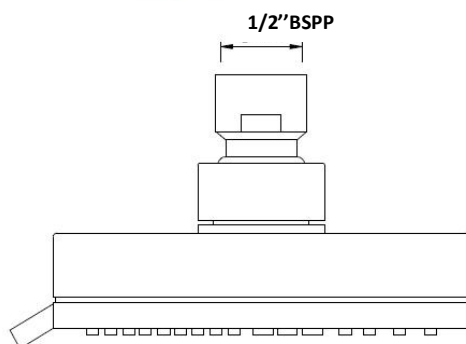

Multi Functions

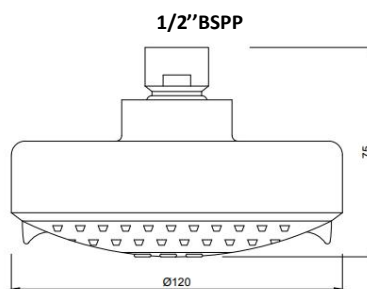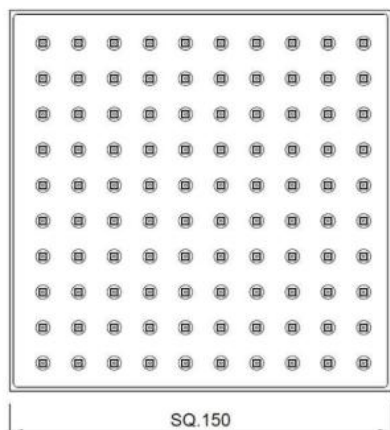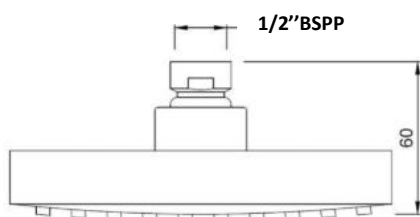



NOTE:

- 1) In Air Effect Shower it's mandatory to use flow restrictor above 1.5 bar water Pressure
- 2) Please shut off the inlet supply after the use of Douche shower.

Installation Guidelines

Pre-installation

Make the inlet supply to the Shower/Douche Shower free from any foreign particle (dirt, debris, etc.) which may affect the functioning of the product by completely flushing the pipeline.

Installation

1. Stop the water supply before installing the Shower/Douche Shower.
2. Connect outlet supply line to the inlet of the Shower/Douche Shower.
3. Open the water supply to check the functions.

Maintenance

Following the below guidelines may be helpful in preserving the look of your newly acquired Shower/Douche Shower...

1. Chrome surfaces may get damaged by acids, detergents, disinfectants, metallic cleaning pads.
2. For lime scale or stain removal usage of 'GLITZ' cleaning solution' is beneficial.
3. Cleaning of Shower nozzles/Holes once in a while is helpful in retaining smooth flow of water.

Troubleshooting

1) Flow related

Problem	: - Reduced Water Flow
Cause	: - Blocked Shower Nozzles/Inlet/Douche Shower's holes
Remedy	: - Clean the Shower Nozzles/Inlet/Douche Shower's holes it can be easily rubbed off by hand or flannel

2) Leakage

Problem	: - Water Leakage
Cause	: - Damaged/Broken/Worn out Washer
Remedy	: - Remove & Replace the defective Washer

Recommended Cleaning Method:-

In this Method just take a soft sponge & wipe the face of shower.

Don't use any hard power soap or bristle sponge.



Rubit Cleaning



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap (pH 5-7) or Glitz solution with a neutral water.

Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap.

This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting.

This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.

For Non
Chrome
Surface



For
Chrome
Surface



**RECOMMENDED CLEANING:-
TWICE IN WEEK.**

NOTE: THIS INSTALLATION SHEET CAN BE REFERRED FOR ALL OVER HEAD SHOWER HAND SHOWER WITH CONNECTION SIZE OF BSPP 1/2" SINGLE INLET TYPE.