




Blush Wall Mounted Sensor faucet with Control Box (Battery Operated)

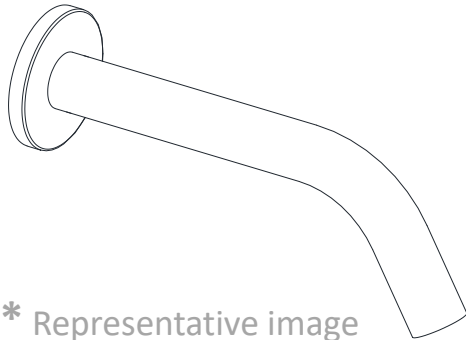


1. Do not install the faucet facing a mirror or any other electronic system operated an infra-red sensor.

2. To prevent reflection problem, it is recommended to keep a minimum distance of 1.5 meters b/w faucet & Other Items.

3. This product should only be fitted by a qualified/certified plumber and should not installed by a non-qualified person.


Temp & water pressure Requirement.

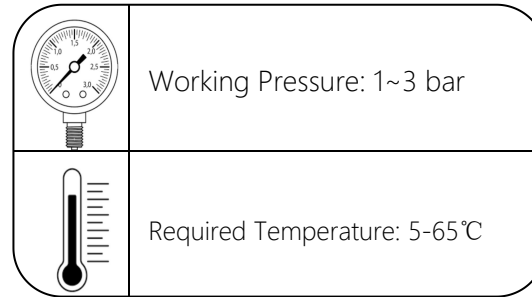

- **Working Pressure:-** The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.


Guideline for Braided hose Installation

- Keep the hose straight as much as possible.
- Don't twist or bend hose during connection.
- Make sure hose is fully tighten to avoid any leakage.

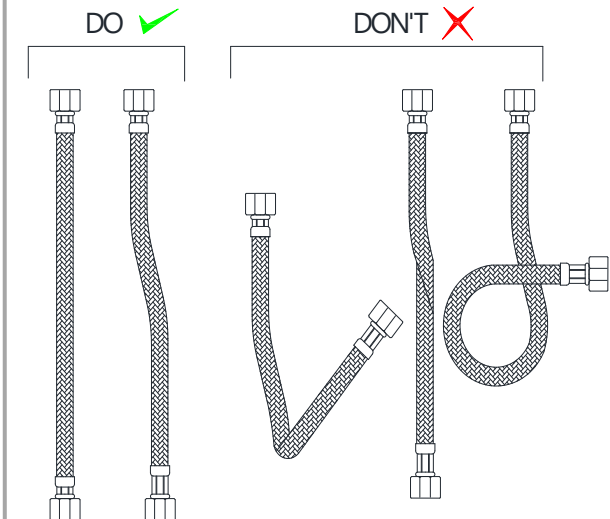


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL BLUSH WALL MOUNTED SENSOR FAUCET WITH CONTROL BOX (BATTERY OPERATED)

BOTH FACUET WITH & WITHOUT PRE-MIX INSTALLATION SCENARIO.

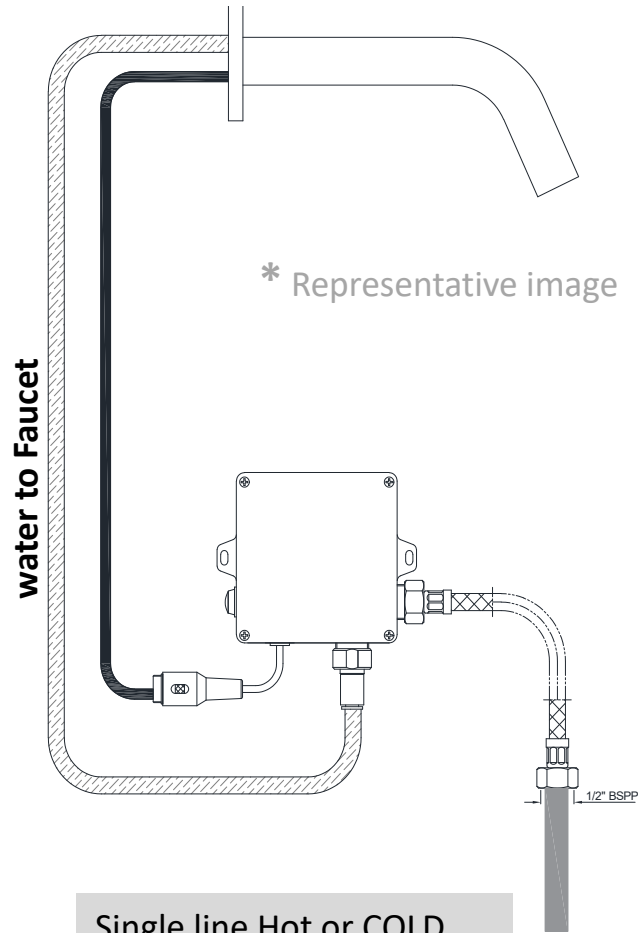Installation Ref. **Without** Pre-mix Vlave

Single line Hot or COLD,
no water mixing.

Installation Ref. With Pre-mix valve.

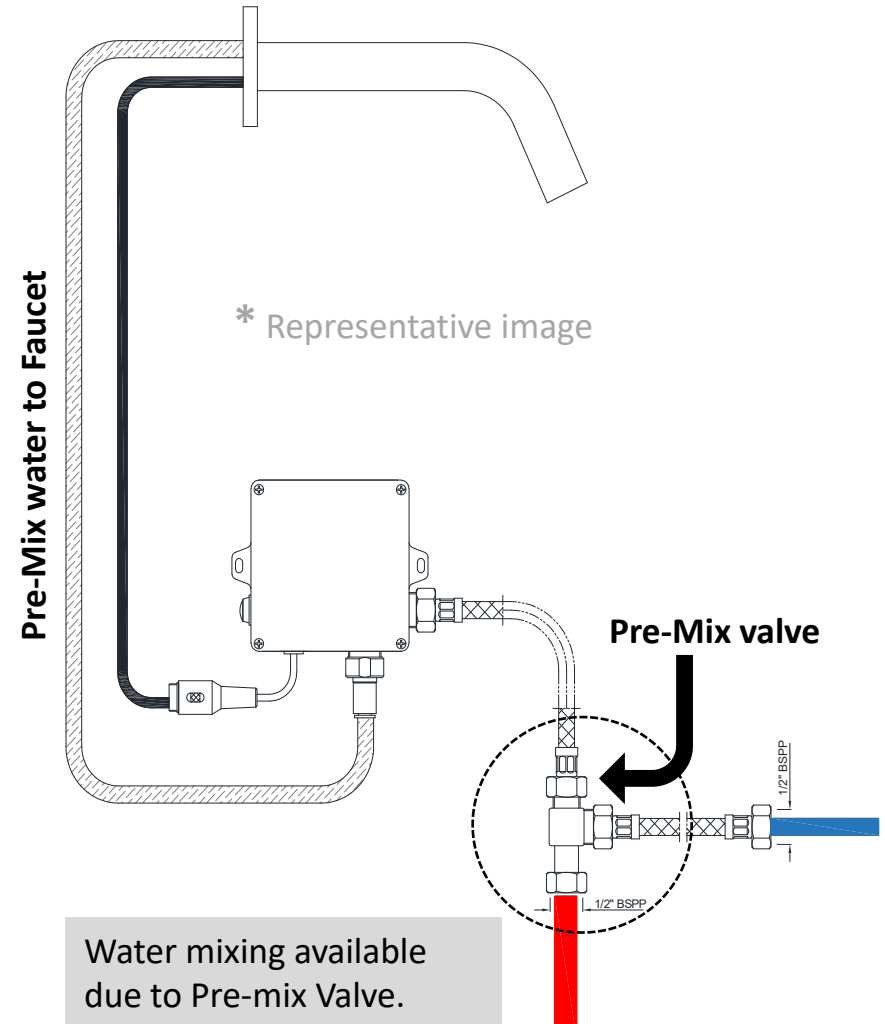


Water mixing available
due to Pre-mix Valve.


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL BLUSH WALL MOUNTED SENSOR FAUCET WITH CONTROL BOX (BATTERY OPERTAED)




Installing Battery.

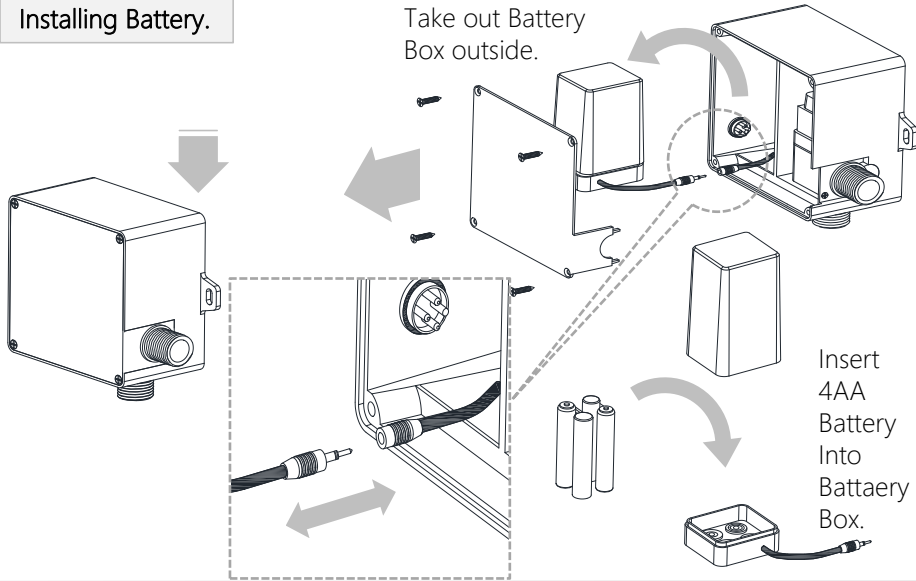



Correct orientation of battery box.

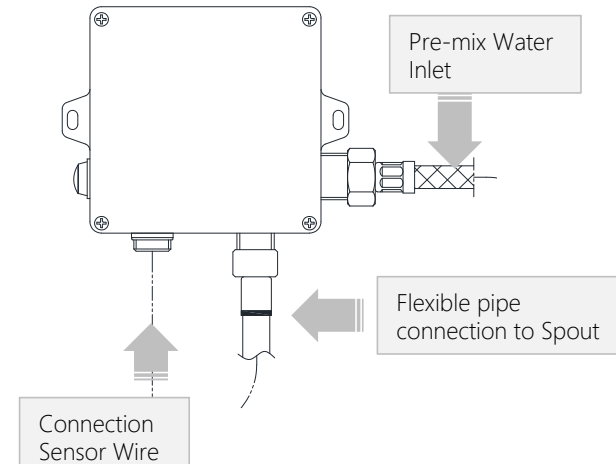


Align Bracket with conduit pipe (pre-fitted for passing cables & flexible water pipe for faucet.

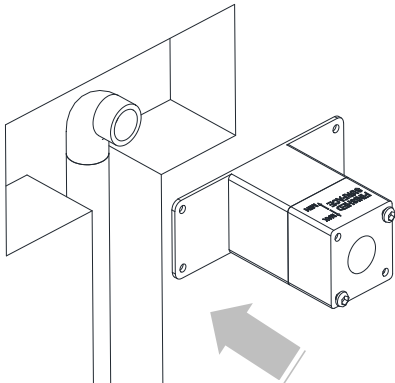


Mark for drill location

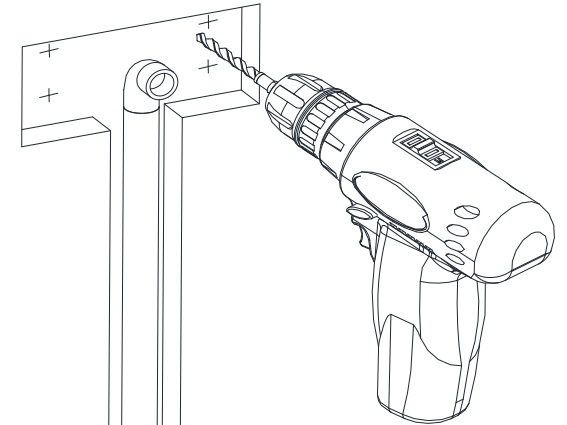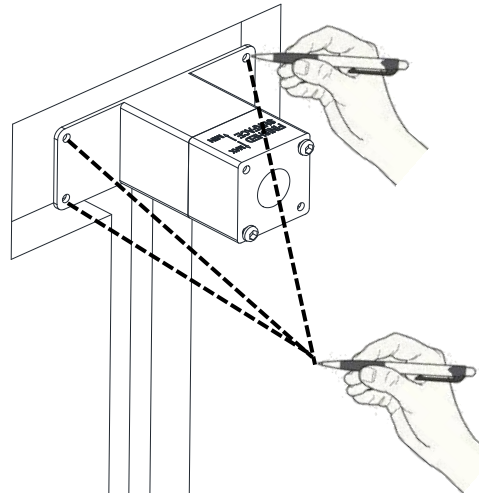

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL BLUSH WALL MOUNTED SENSOR FAUCET WITH CONTROL BOX (BATTERY OPERATED)

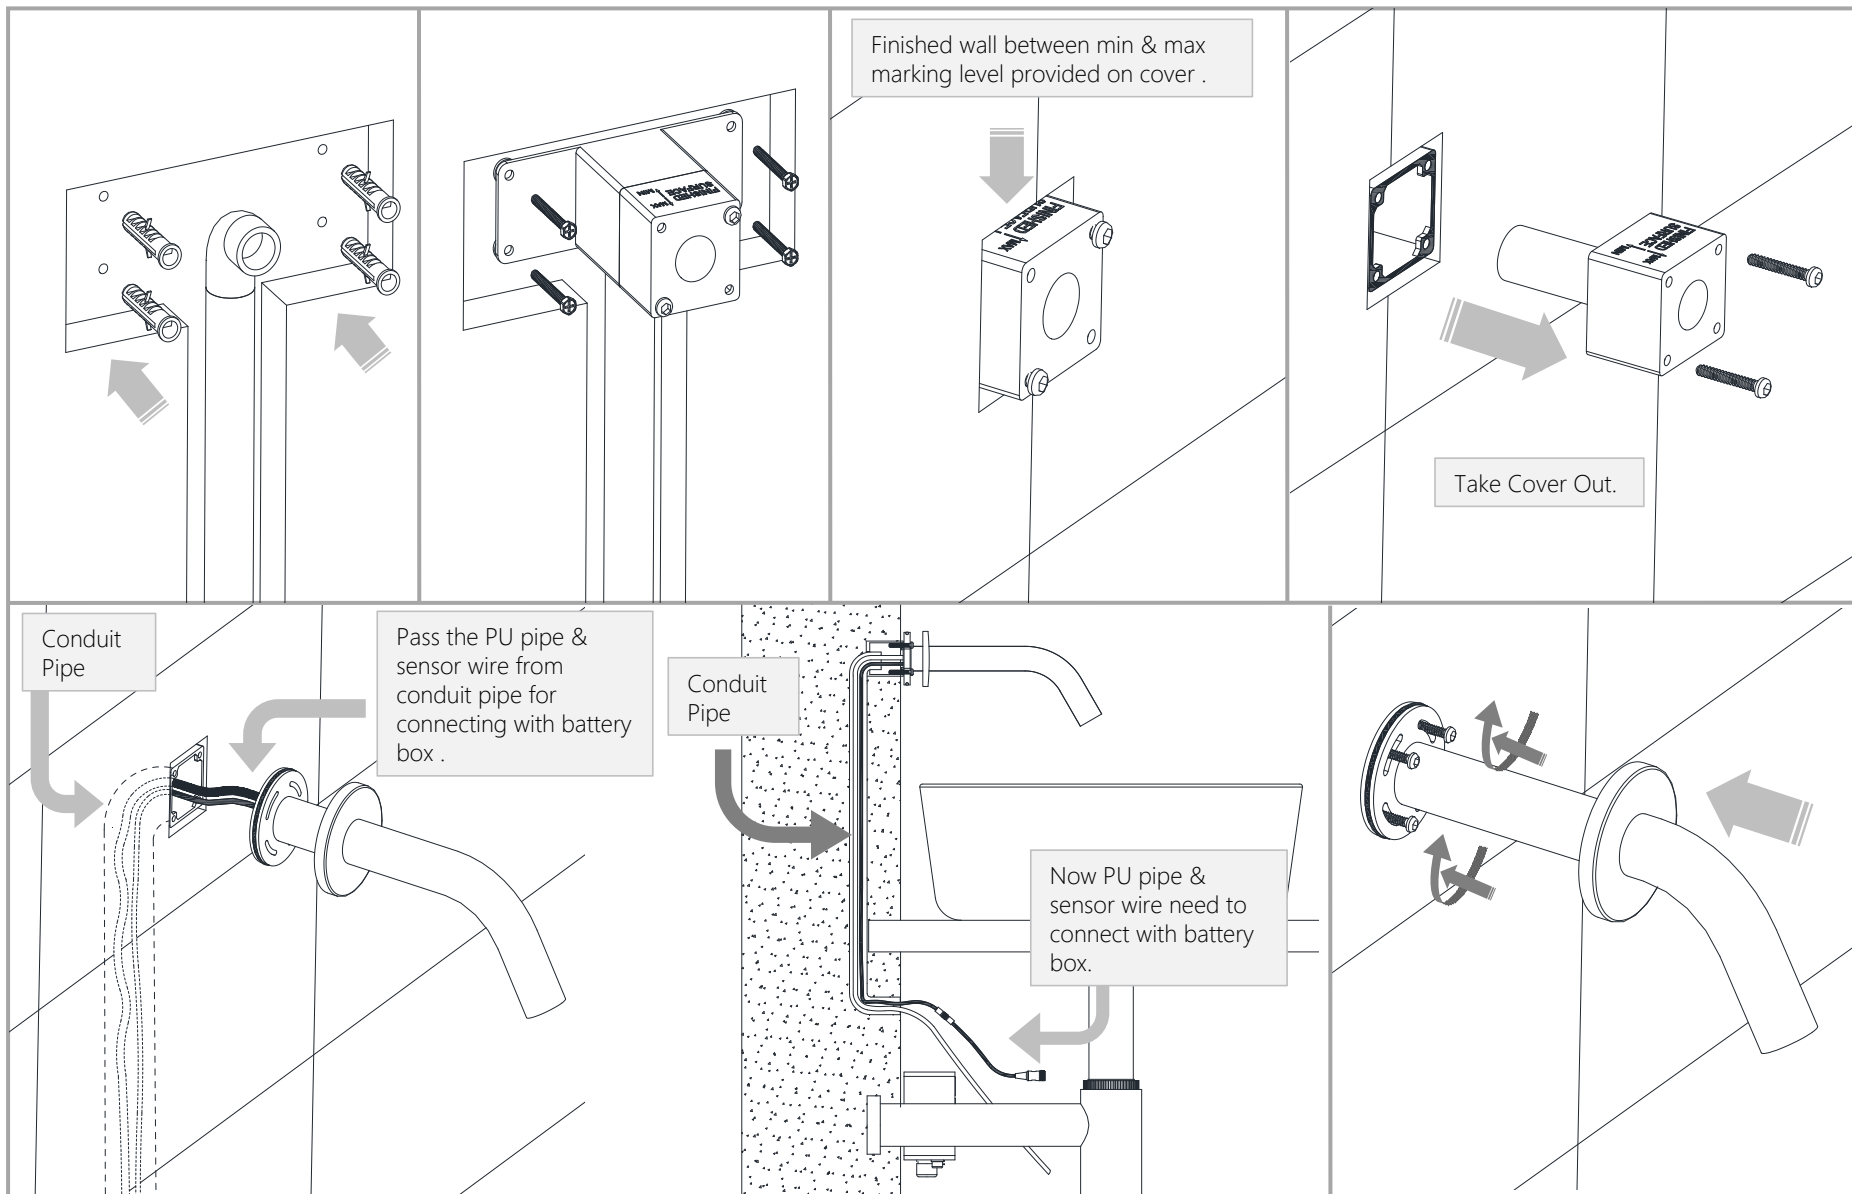


Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL BLUSH WALL MOUNTED SENSOR FAUCET WITH CONTROL BOX (BATTERY OPERATED)

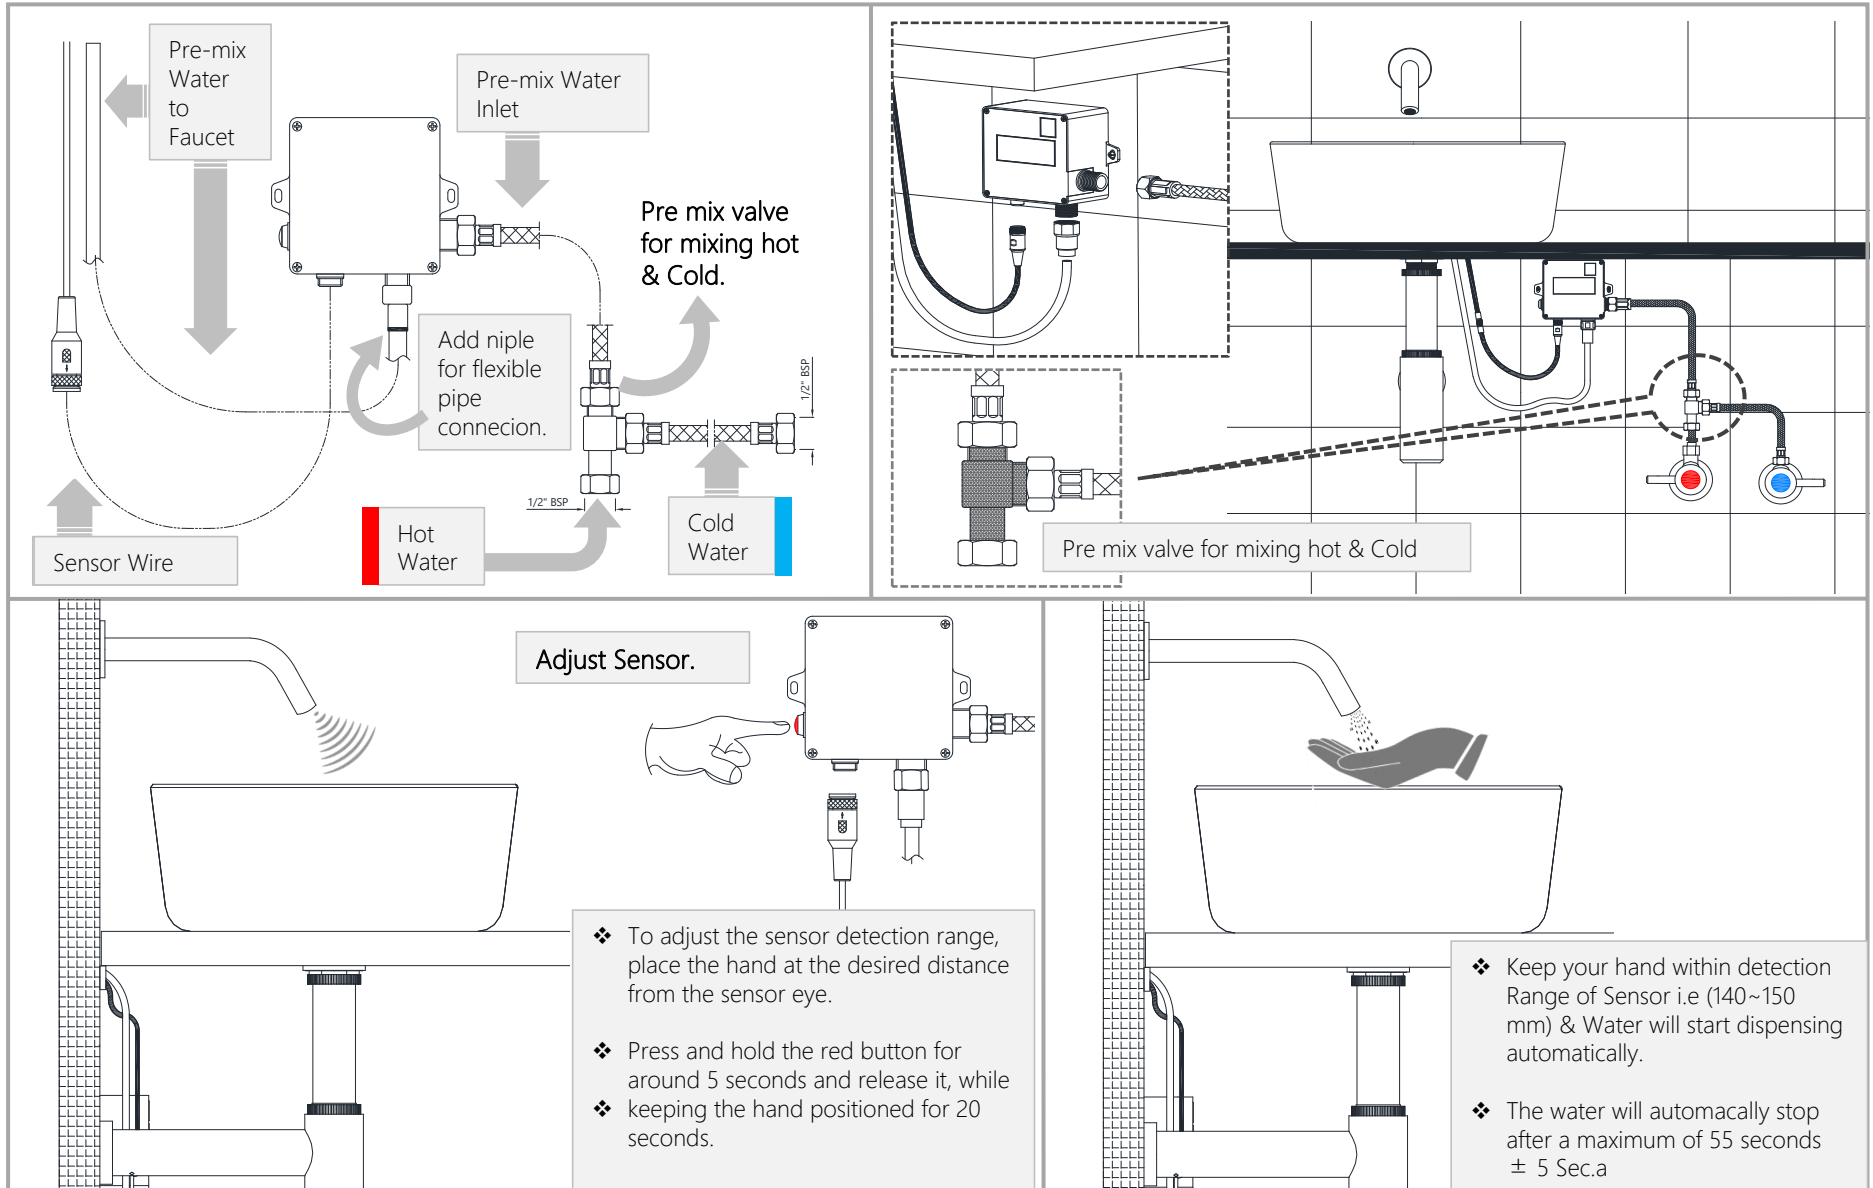



Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL BLUSH WALL MOUNTED SENSOR FAUCET WITH CONTROL BOX (BATTERY OPERATED)



Note: Apply liquid soap pH-B/W 5~7 or Glitz .

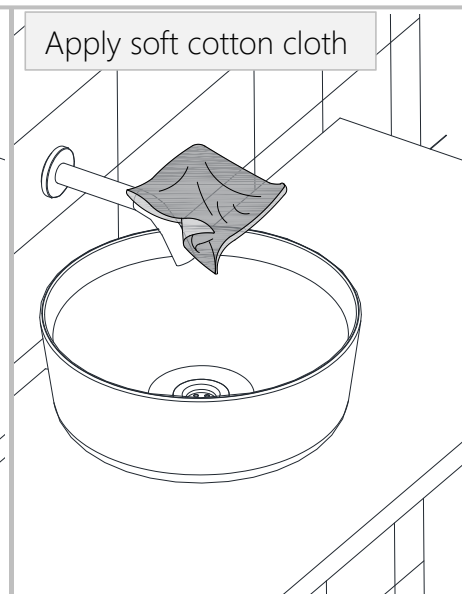


Apply soft cotton cloth

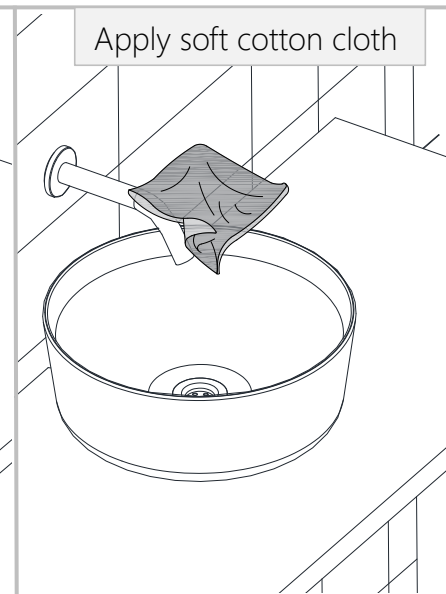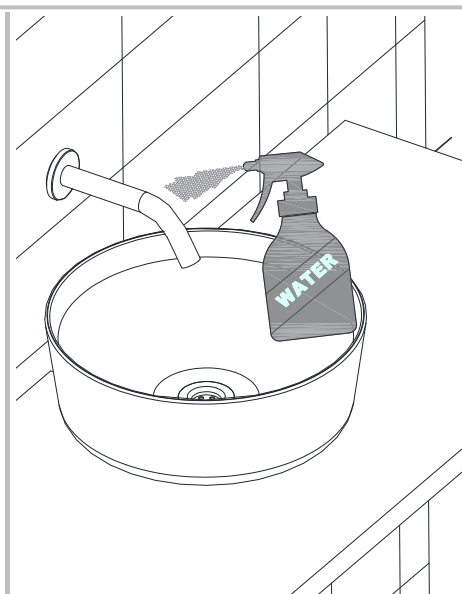

Apply soft cotton cloth




✗ DON'T

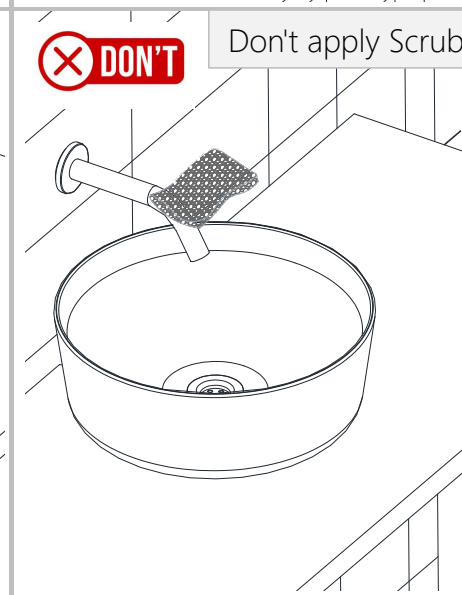

✗ DON'T

Don't apply Scrub

Steps & Cleaning agents requirements for Cleaning.

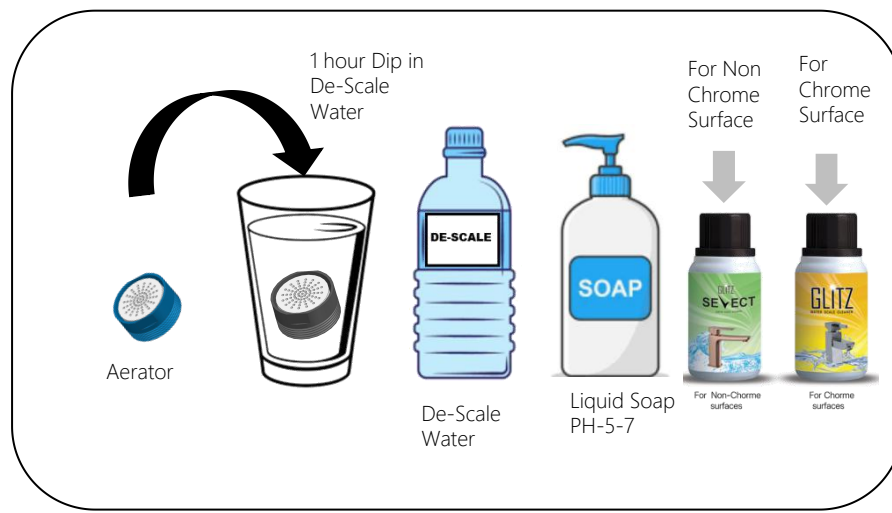

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL BLUSH WALL MOUNTED SENSOR FAUCET WITH CONTROL BOX (BATTERY OPERTAED)