















INSTALLATION GUIDE

Requirements:-



- ◆ Pencil for marking, Measuring tape, Teflon Tape.
- ◆ Allen key for screw tightening (Included in box)

NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL PRESSMATIC WALL MOUNTED BASIN TAP AUTO CLOSING SYSTEM.


* Representative image

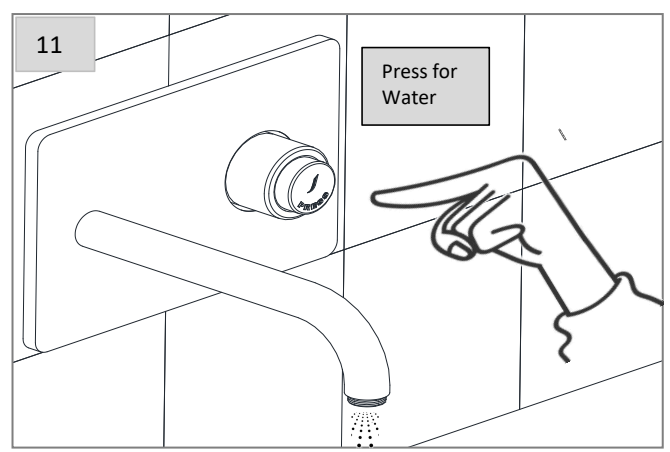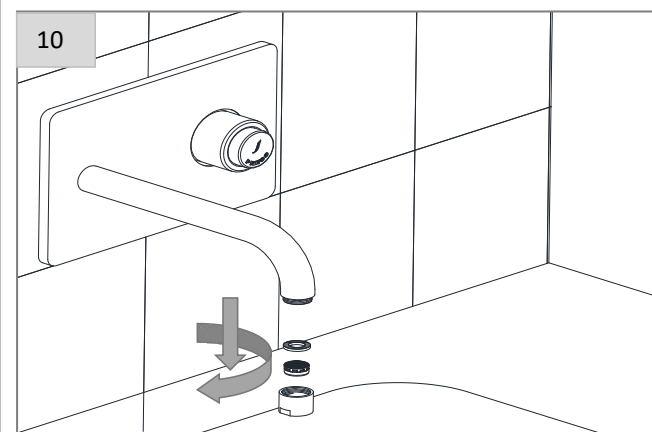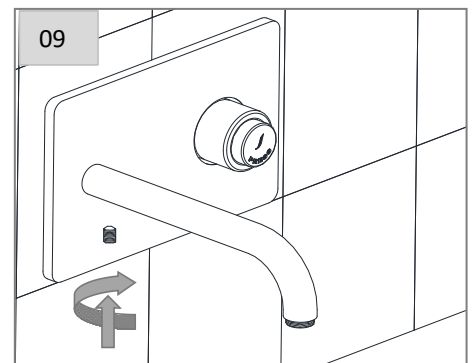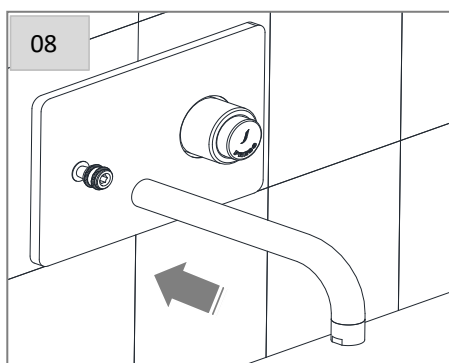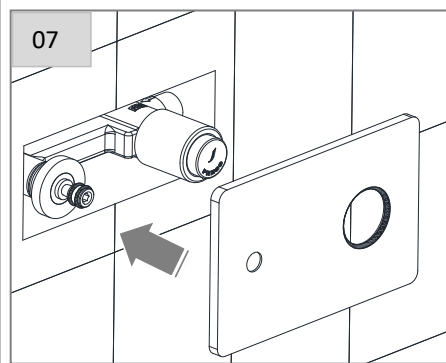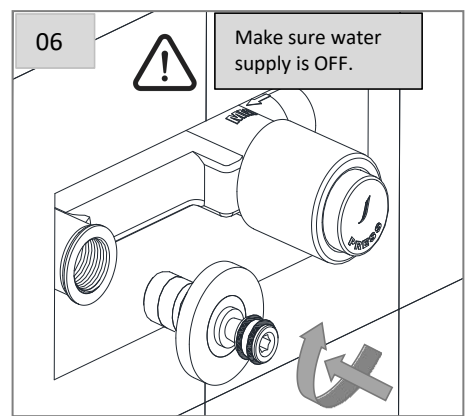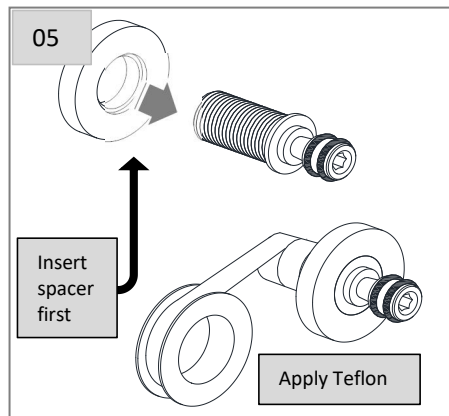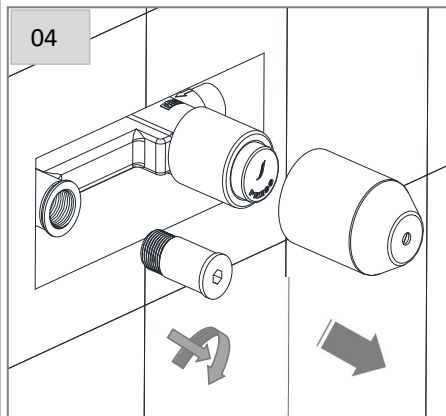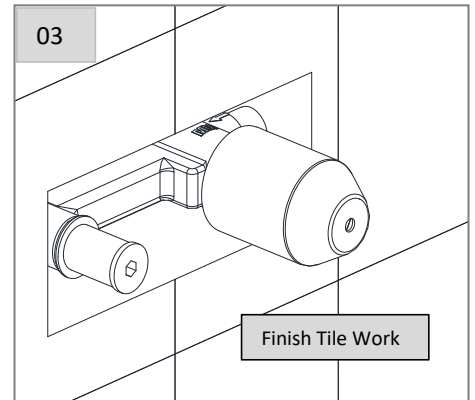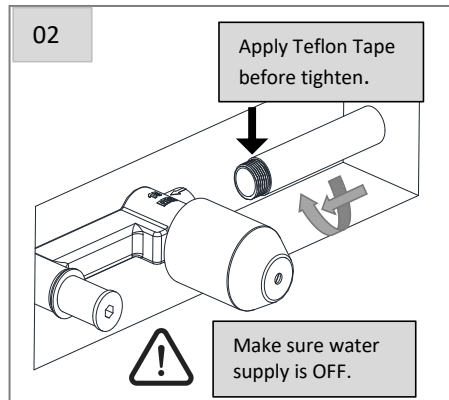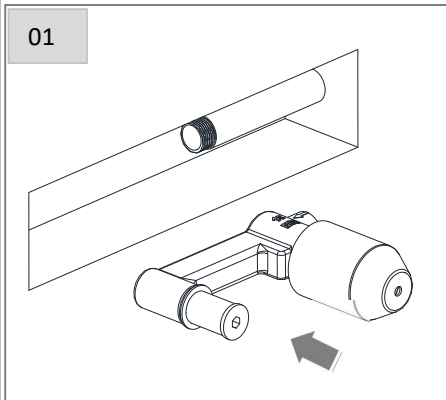

12

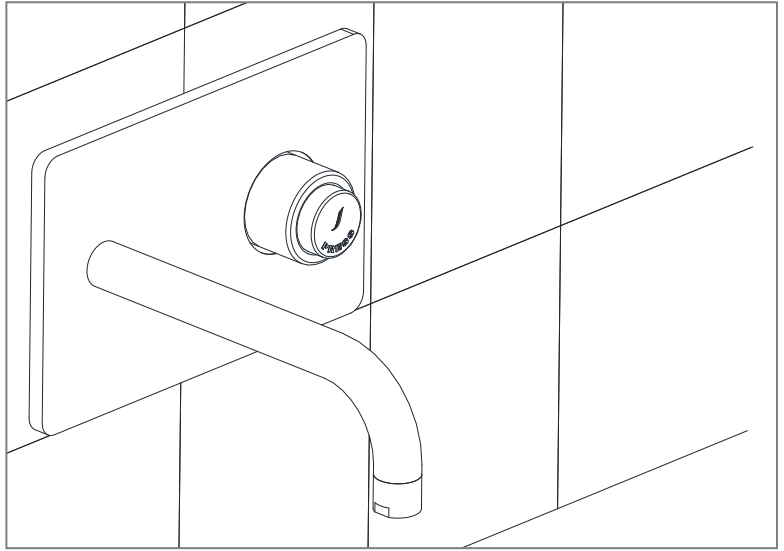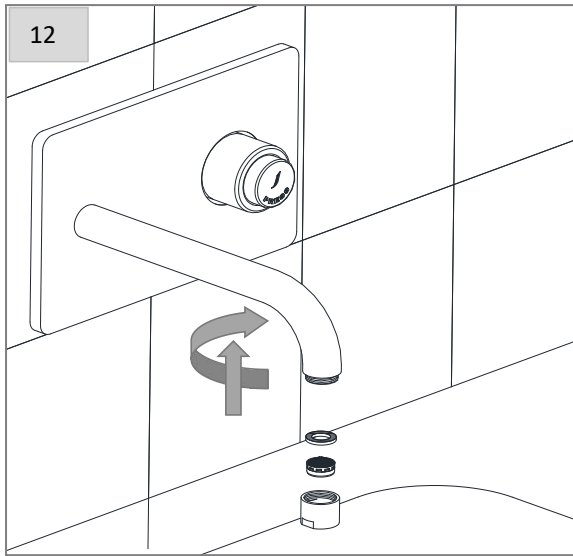

How to operate:-

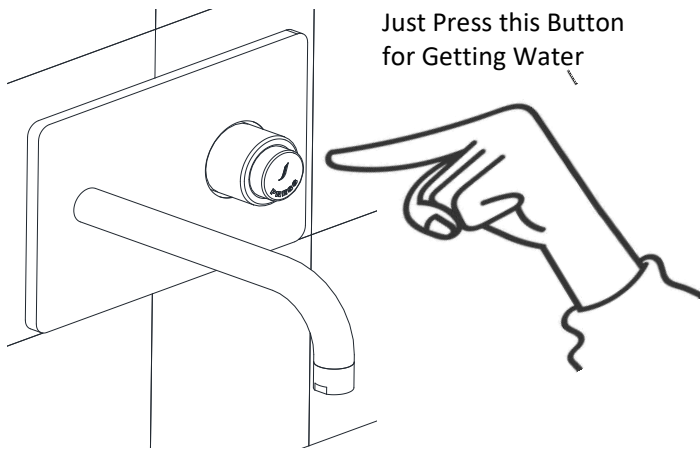

NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL PRESSMATIC WALL MOUNTED BASIN TAP AUTO CLOSING SYSTEM.

Recommended Cleaning:- Twice in a Week.

Steps & Cleaning agents requirements for Cleaning.



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap (pH 5-7) or Glitz solution with a neutral water.

Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap. This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:


Again, wipe with a soft cotton cloth to dry the fitting. This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

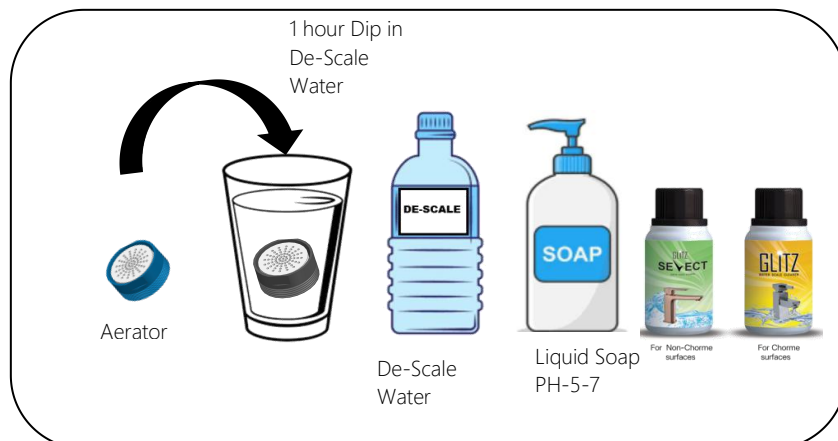

For Non
Chrome
Surface

For
Chrome
Surface

