




INSTALLATION GUIDE









NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SPOUT OPERATED PILLAR TAP ROUND SHAPE WITH BASE FLANGE.



Requirements:-



- ◆ Water line, braided hose for connection to Angle valve.
- ◆ Wrench for fitting & tightening.

* Representative image

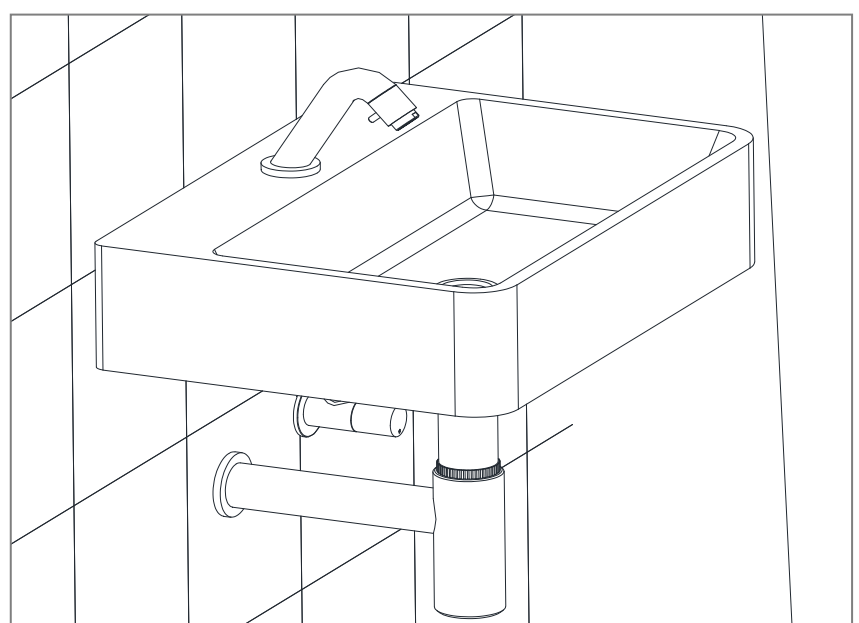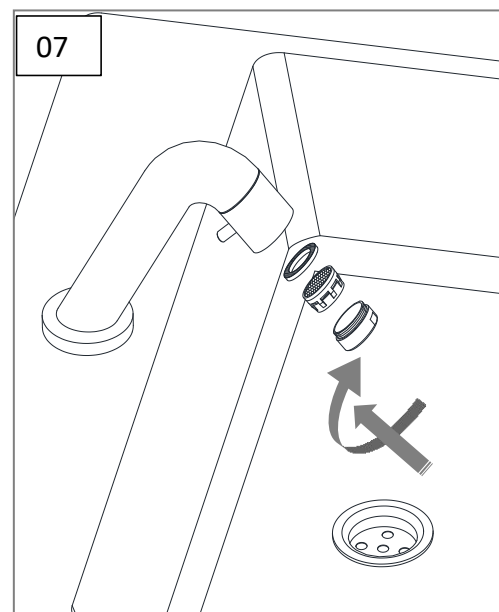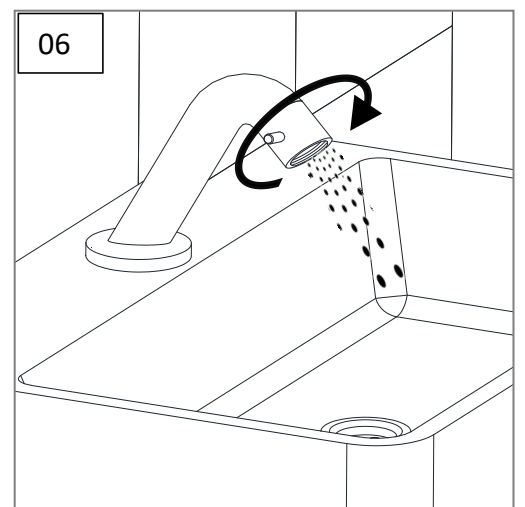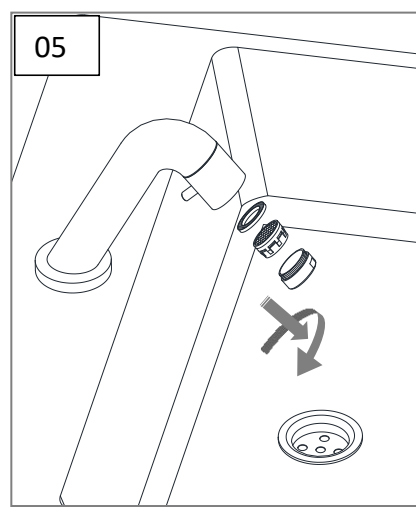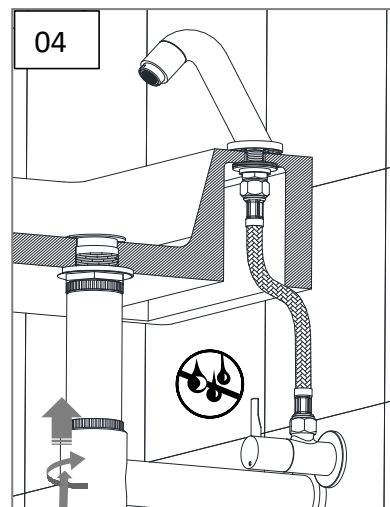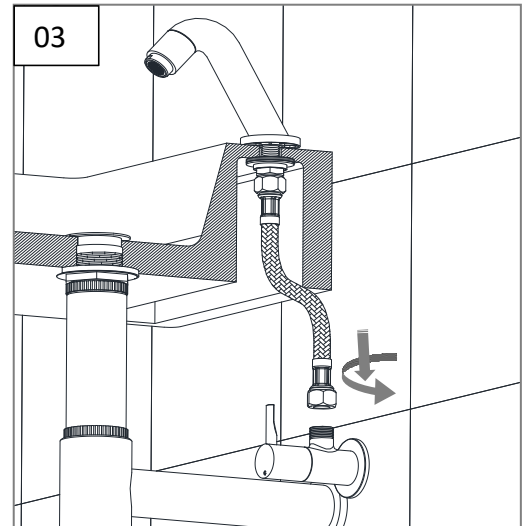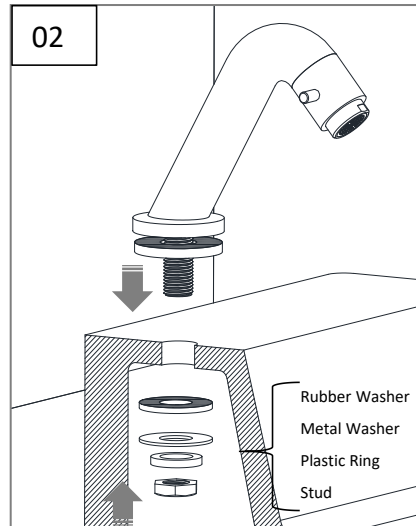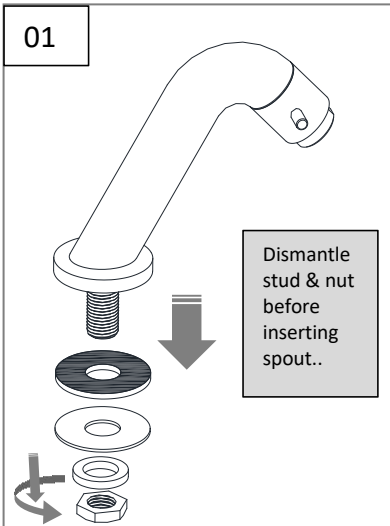



How to operate

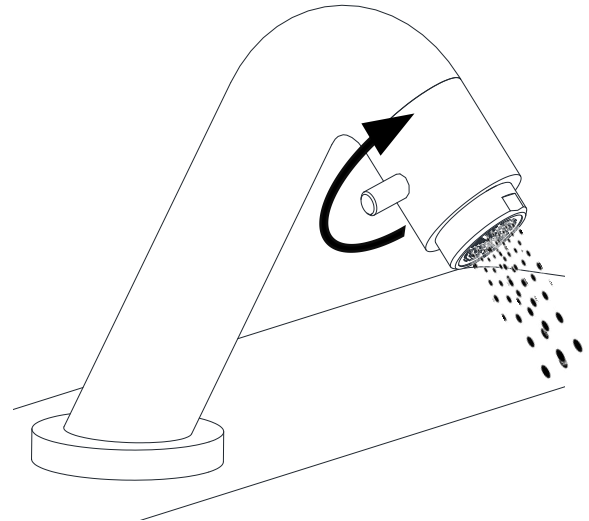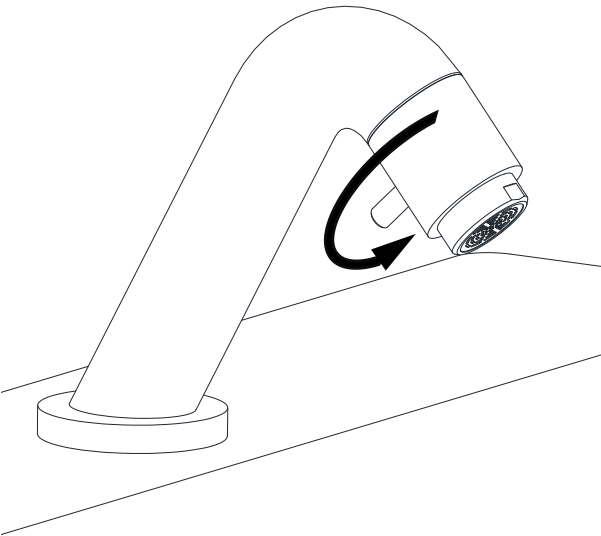

Water off Condition



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap (pH 5-7) or Glitz solution with a neutral water.
Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.
This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap.
This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting.
This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:
It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:
Scrubbing with rough materials can damage the finish and reduce shine.


Water On Condition

For Non
Chrome
Surface

For
Chrome
Surface



Recommended Cleaning:- Twice in a Week.
Steps & Cleaning agents requirements for Cleaning.

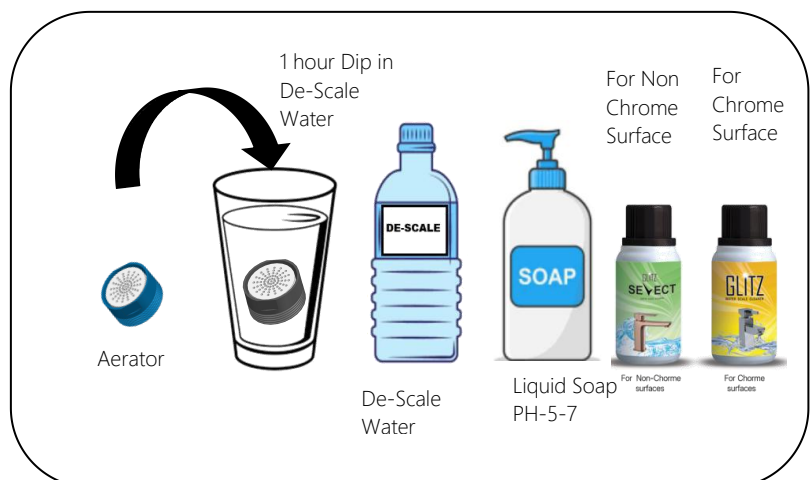

NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SPOUT OPERATED PILLAR TAP ROUND SHAPE WITH BASE FLANGE.