




Single Lever Sink Mixer with Swinging Spout on Upper Side (Wall Mounted Model)

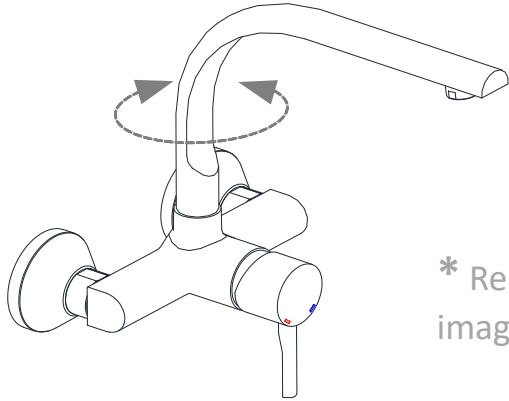


* Representative image

Temp & water pressure Requirement.

	Working Pressure: 1~3 bar
	Required Temperature: 5-65°C

Country wise leg adjustment.

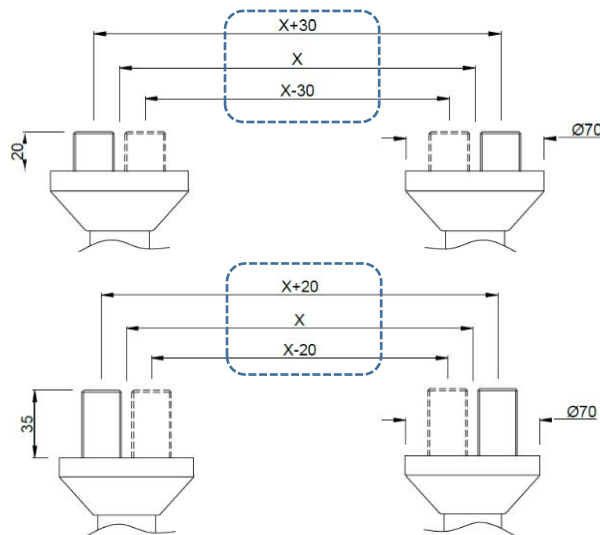


For
International


For India

- **Working Pressure:-**The water pressure should be Between 1 and 3 bar for proper functioning.
- **Required Temperature:-** The water temperature within the range of 5-65° for safe & effective use.
- **Note:-** These are recommended values for achieving conventional /Optimum output.

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE SINK MIXER WITH SWINGING SPOUT ON UPPER SIDE WALL MOUNTED MODEL.







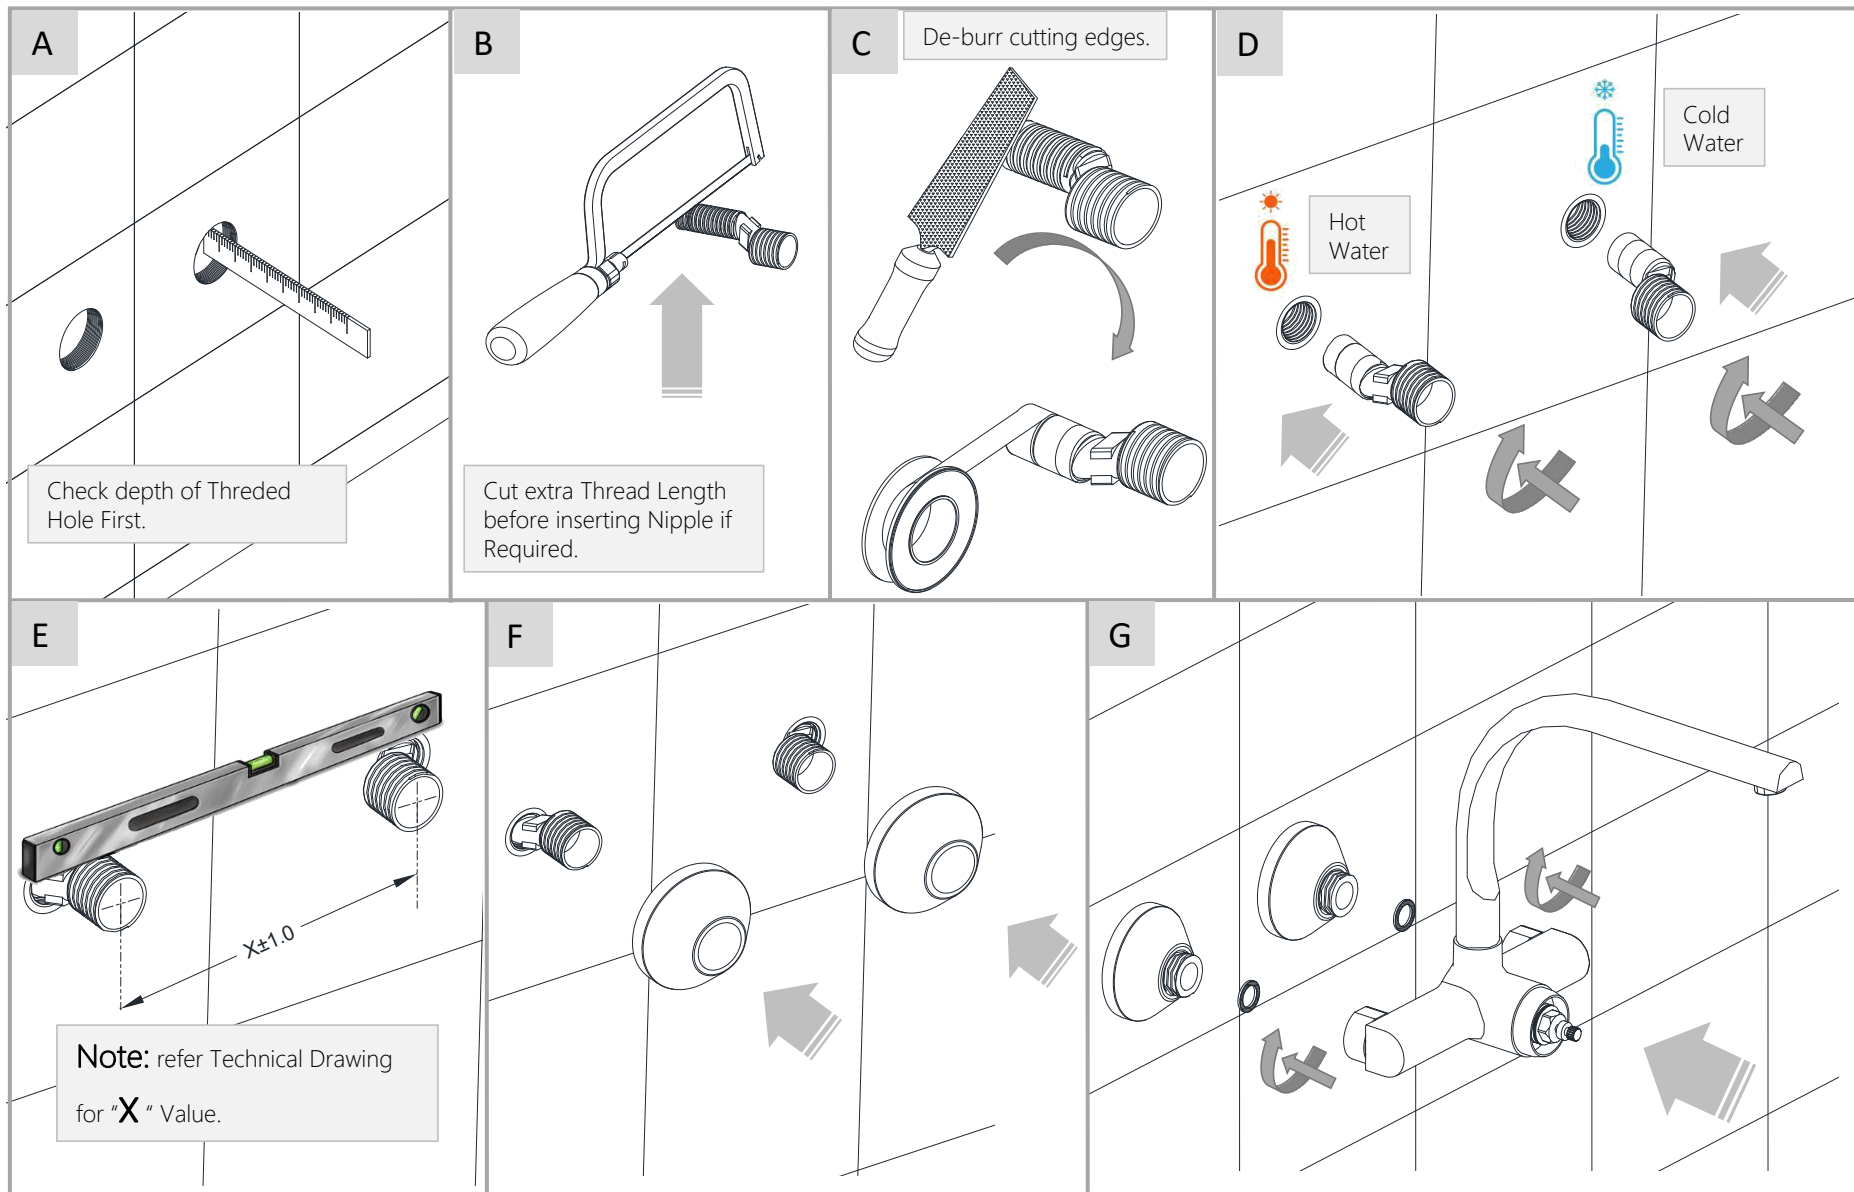


NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE SINK MIXER WITH SWINGING SPOUT ON UPPER SIDE WALL MOUNTED MODEL.

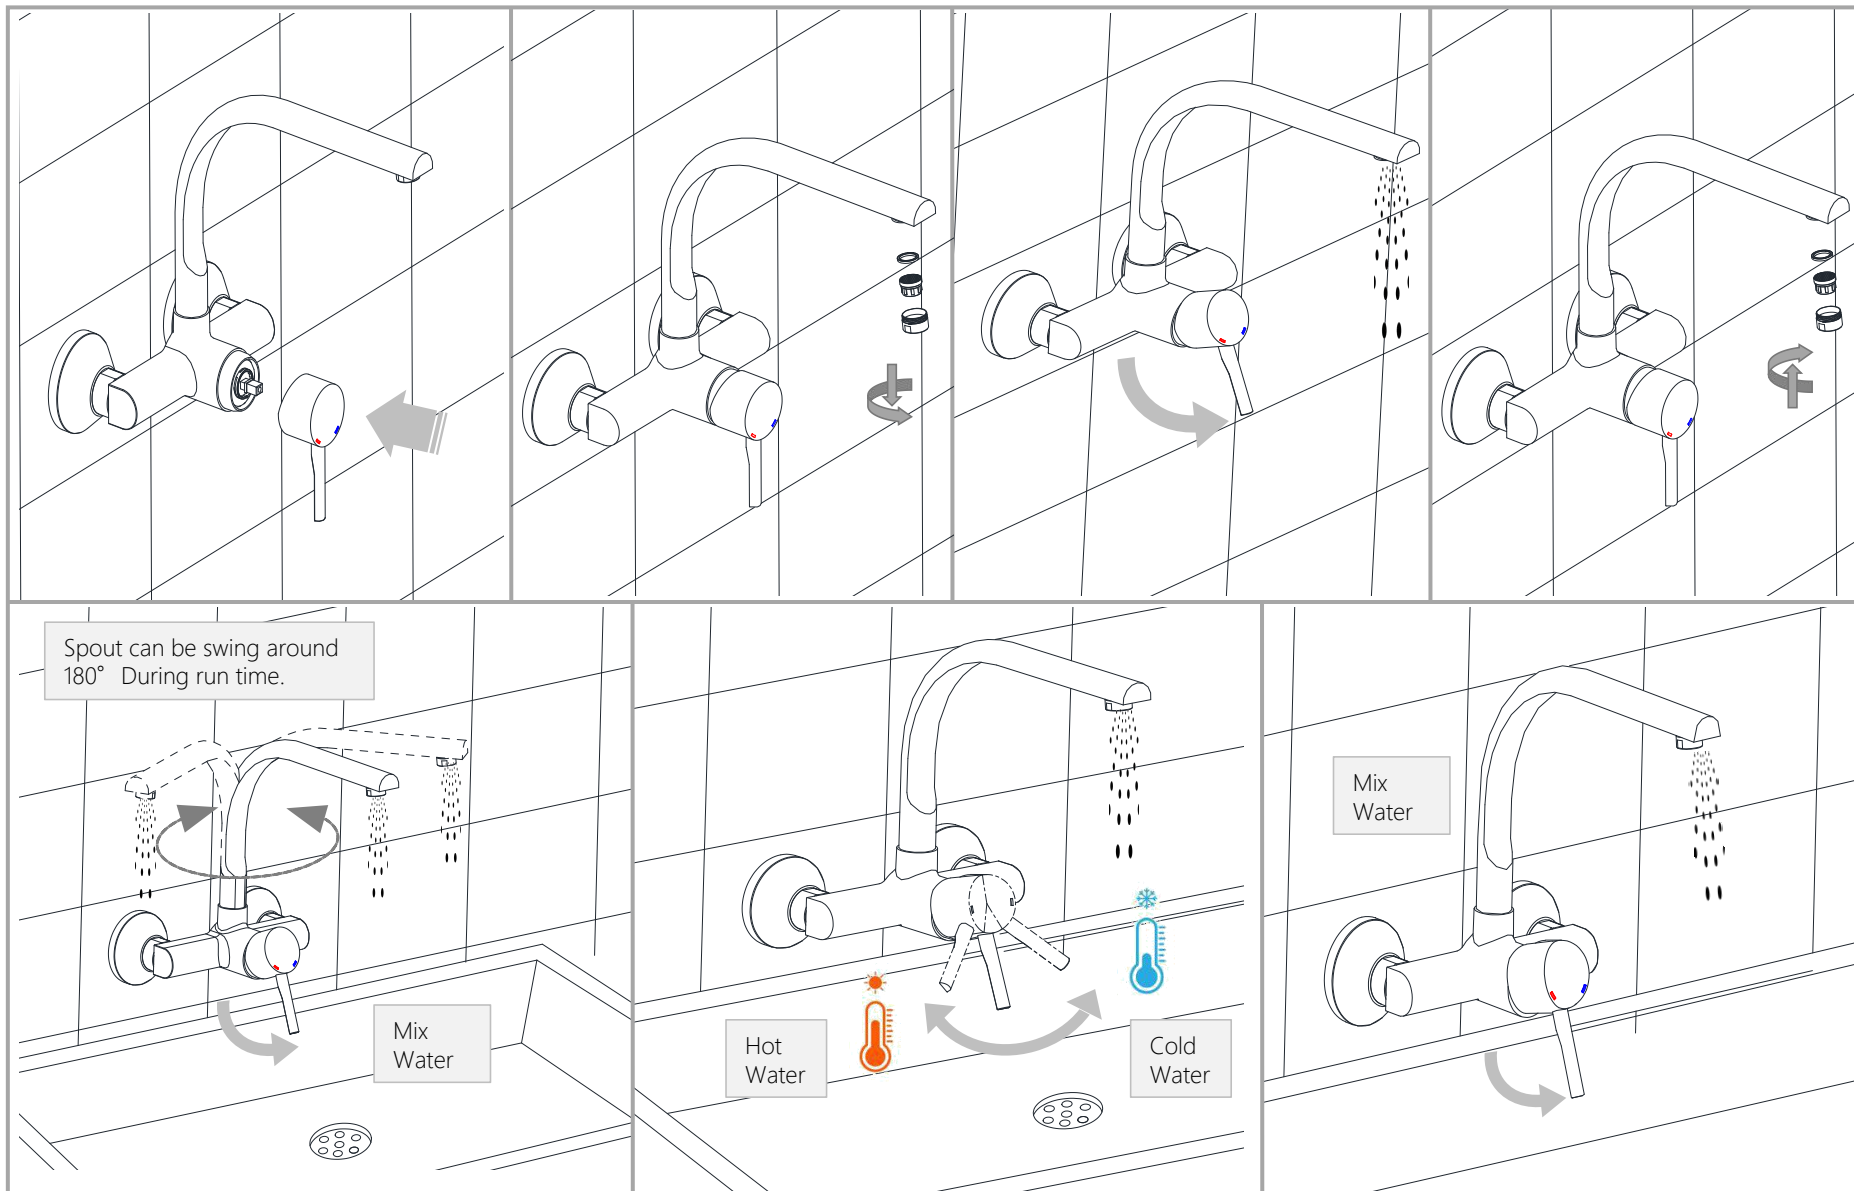

NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE SINK MIXER WITH SWINGING SPOUT ON UPPER SIDE WALL MOUNTED MODEL.

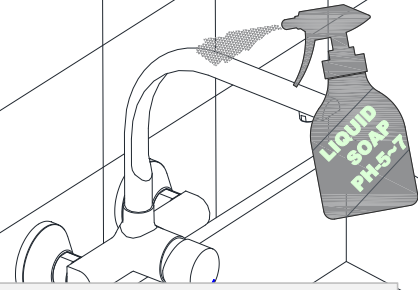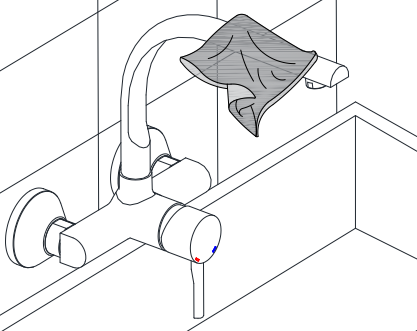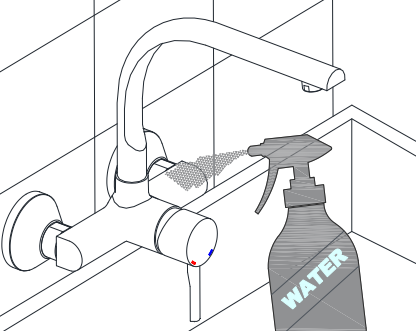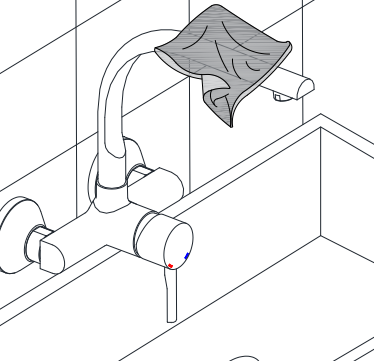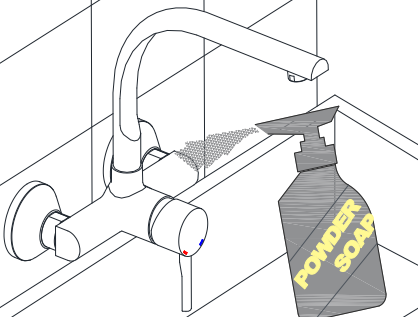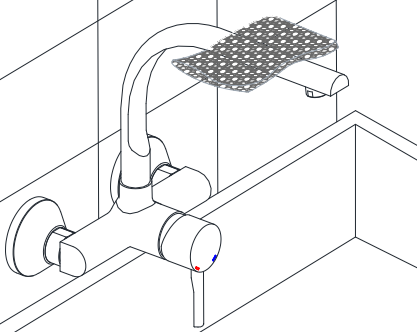

 LIQUID SOAP PH-5-7 Note: Apply liquid soap pH-B/W 5~7 or Glitz .	Apply soft cotton cloth 	 WATER	Apply soft cotton cloth 
✗ DON'T  POWDER SOAP	✗ DON'T Don't apply Scrub 	<u>Steps & Cleaning agents requirements for Cleaning.</u>  1 hour Dip in De-Scale Water Aerator  De-Scale Water  Liquid Soap PH-5-7  For Non-Chrome surfaces  For Chrome surfaces Recommended Cleaning:-Twice a week.	

NOTE: THIS INSTALLATION MANUAL CAN BE REFERRED FOR ALL SINGLE SINK MIXER WITH SWINGING SPOUT ON UPPER SIDE WALL MOUNTED MODEL.