

**ERIS 05 20W**


ERIS ROUND CLEAR GLASS COB DOWNLIGHT

**Indoor Luminaire**

**Product Code:**

LERS05R020XC / LERS05R020XN / LERS05R020XW

20W - 2100lm - 6500K - CRI>90 - Beam Angle 45°



**Technical Specifications**


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	20W ± 10%
Rated Input Current	0.090 Amp (Nominal)
Power Factor	≥0.90
THD	<10%
Rated Luminous Flux	2100 lm / 2000 lm / 1900 lm (tolerance as per BIS)
Rated Luminaire Efficacy	105 lm/W / 100 lm/W / 95 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>90
Beam Angle	45°
Driver Efficiency	≥85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Housing with White/Black Powder Coating
Lens / Reflector	Reflector
Mounting	Recess

**Protections**

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

# Light Distribution

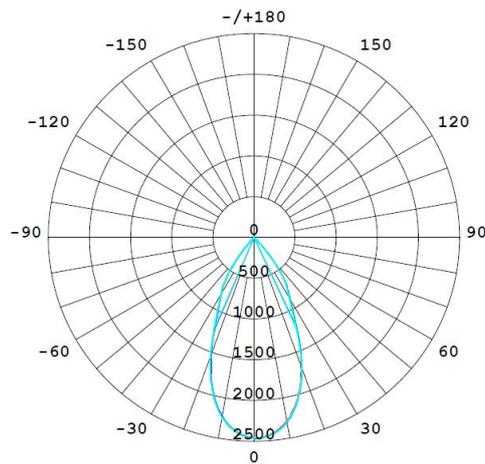


## UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	8.8	9.7	9.0	9.8	10.0	8.7	9.6	8.9	9.8	10.0
3H	8.6	9.5	8.9	9.7	9.9	8.6	9.4	8.8	9.6	9.8
4H	8.5	9.3	8.8	9.6	9.8	8.5	9.3	8.8	9.5	9.7
6H	8.5	9.2	8.8	9.4	9.7	8.4	9.2	8.7	9.4	9.6
8H	8.4	9.1	8.7	9.4	9.6	8.4	9.1	8.7	9.3	9.6
12H	8.4	9.1	8.7	9.3	9.6	8.3	9.0	8.6	9.3	9.6
4H 2H	8.5	9.3	8.8	9.5	9.8	8.5	9.3	8.8	9.5	9.7
3H	8.4	9.1	8.7	9.3	9.6	8.4	9.0	8.7	9.3	9.6
4H	8.3	8.9	8.7	9.2	9.5	8.3	8.9	8.6	9.2	9.5
6H	8.2	8.8	8.6	9.1	9.4	8.2	8.7	8.6	9.1	9.4
8H	8.2	8.7	8.6	9.0	9.4	8.1	8.6	8.5	9.0	9.4
12H	8.1	8.6	8.5	9.0	9.3	8.1	8.5	8.5	8.9	9.3
8H 4H	8.2	8.7	8.6	9.0	9.4	8.1	8.6	8.5	9.0	9.4
6H	8.1	8.5	8.5	8.9	9.3	8.0	8.4	8.5	8.8	9.3
8H	8.0	8.4	8.5	8.8	9.2	8.0	8.3	8.4	8.8	9.2
12H	8.0	8.3	8.4	8.7	9.2	7.9	8.2	8.4	8.7	9.1
12H 4H	8.1	8.6	8.5	9.0	9.3	8.1	8.5	8.5	8.9	9.3
6H	8.0	8.4	8.5	8.8	9.2	8.0	8.3	8.4	8.8	9.2
8H	8.0	8.3	8.4	8.7	9.2	7.9	8.2	8.4	8.7	9.1
Variations with the observer position at spacings (CIE Pub.117):										
S = 1.0H	+ 3.3 / -10.9					+ 3.2 / -10.9				
1.5H	+ 5.9 / - 9.8					+ 5.9 / - 9.9				
2.0H	+ 5.4 / - 2.5					+ 5.2 / - 2.3				

## Product Dimensions (DiaxH)

Ø150 X 75mm (Tol.  $\pm 5$  mm), Cutout Dia . Ø130

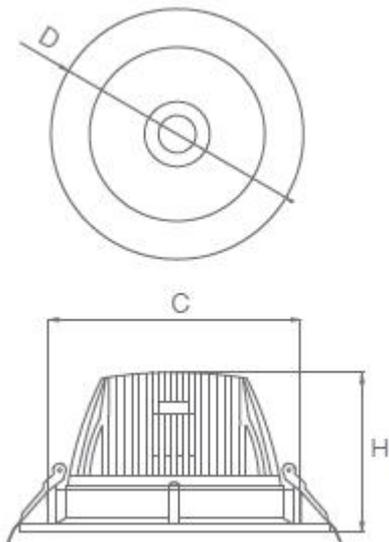

## Applications

Residences, Offices, Small Retail Shops,  
Hotels, Coffee Shops, Restaurants, Hospitals,  
area lighting and for other indoor applications.