

ERIS REFLECTO 30W


ERIS REFLECTO ROUND COB DOWNLIGHT

Indoor Luminaire

Product Code:

LERS04R030XC / LERS04R030XN / LERS04R030XW

30W - 1950lm - 6500K - CRI>90 - Beam Angle 52°



Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	30W ± 10%
Rated Input Current	0.140 Amp (Nominal)
Power Factor	≥0.90
THD	<20%
Rated Luminous Flux	1950 lm / 1800 lm / 1650 lm (tolerance as per BIS)
Rated Luminaire Efficacy	65 lm/W / 60 lm/W / 55 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>90 Ra
Beam Angle	52°
Driver Efficiency	≥85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium with White Powder Coating
Lens / Reflector	Anodized Reflector
Mounting	Recess

Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	NA
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

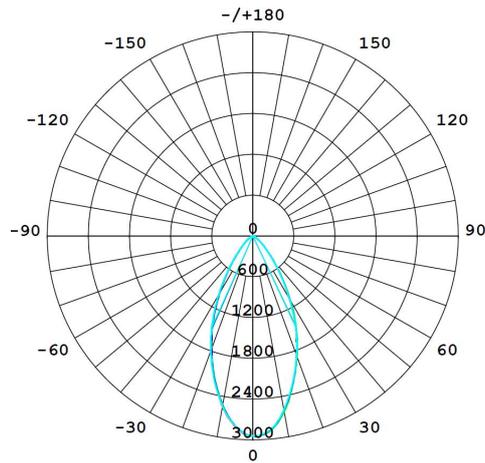


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.3	11.3	10.5	11.5	11.6	10.2	11.2	10.4	11.4	11.5
3H	10.2	11.1	10.4	11.3	11.5	10.1	11.0	10.3	11.2	11.4
4H	10.1	10.9	10.4	11.2	11.4	10.0	10.8	10.3	11.1	11.3
6H	10.0	10.8	10.3	11.0	11.3	9.9	10.7	10.2	10.9	11.2
8H	9.9	10.7	10.3	11.0	11.2	9.8	10.6	10.2	10.9	11.1
12H	9.9	10.6	10.2	10.9	11.2	9.8	10.5	10.1	10.8	11.1
4H 2H	10.2	11.0	10.4	11.2	11.5	10.1	10.9	10.3	11.1	11.4
3H	10.0	10.8	10.4	11.0	11.3	9.9	10.7	10.3	10.9	11.2
4H	9.9	10.6	10.3	10.9	11.2	9.8	10.5	10.2	10.8	11.1
6H	9.8	10.4	10.2	10.8	11.1	9.7	10.3	10.1	10.7	11.0
8H	9.8	10.3	10.2	10.7	11.1	9.7	10.2	10.1	10.6	11.0
12H	9.7	10.2	10.1	10.6	11.0	9.6	10.1	10.1	10.5	10.9
8H 4H	9.8	10.3	10.2	10.7	11.1	9.7	10.2	10.1	10.6	11.0
6H	9.7	10.1	10.1	10.5	10.9	9.6	10.0	10.0	10.4	10.8
8H	9.6	10.0	10.1	10.4	10.9	9.5	9.9	10.0	10.4	10.8
12H	9.6	9.9	10.1	10.4	10.8	9.5	9.8	10.0	10.3	10.7
12H 4H	9.7	10.2	10.2	10.6	11.0	9.6	10.1	10.1	10.5	10.9
6H	9.6	10.0	10.1	10.4	10.9	9.5	9.9	10.0	10.4	10.8
8H	9.6	9.9	10.1	10.4	10.8	9.5	9.8	10.0	10.3	10.7
Variations with the observer position at spacings (CIE Pub.117):										
S = 1.0H	+ 2.0 / - 4.7					+ 2.1 / - 4.7				
1.5H	+ 3.0 / - 3.0					+ 3.0 / - 3.0				
2.0H	+ 3.7 / - 5.1					+ 3.7 / - 5.1				

Product Dimensions (D x H), Cutout Size

Ø 170 X 75mm (Tol. ± 5 mm), Ø140mm

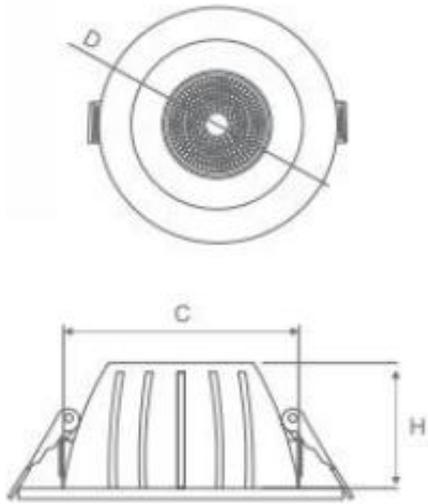

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.