


INSTARAY SLIM 40W

Instaray Slim LED Magnetic Fixed Linear Light
Indoor Luminaire

Product Code:

LINRSD1F40XC / LINRSD1F40XN / LINRSD1F40XW
40W - 1600lm - 6500K - CRI>80 Ra - Beam Angle 110°



Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	48V DC
Rated Input Wattage	40W ± 10%
Rated Input Current	0.830 Amp (Nominal)
Rated Luminous Flux	1600 lm / 1400 lm / 1200 lm (tolerance as per BIS)
Rated Luminaire Efficacy	40 lm/W / 35 lm/W / 30 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	110° (within the permissible limits)
Driver Efficiency	≥88%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium & Polycarbonate
Lens / Reflector	Frosted Polycarbonate Milky Diffuser
Mounting	Surface with Magnetic Track Channel

Protections

Over Voltage Protection	NA
Surge Protection	±3.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	NA
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

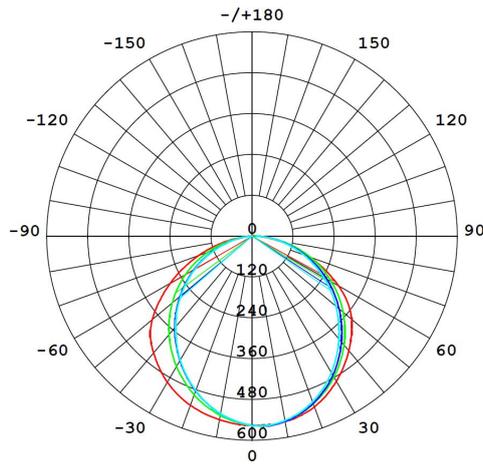


UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions	Viewed crosswise					Viewed endwise					
x = 2H y = 2H	24.5	26.0	24.7	26.2	26.4	23.7	25.2	24.0	25.4	25.6	
3H	26.3	27.7	26.6	27.9	28.2	25.4	26.8	25.7	27.0	27.2	
4H	27.0	28.3	27.3	28.6	28.8	26.1	27.4	26.4	27.7	27.9	
6H	27.5	28.7	27.8	29.0	29.3	26.7	28.0	27.0	28.2	28.5	
8H	27.6	28.8	28.0	29.1	29.4	26.9	28.2	27.3	28.4	28.7	
12H	27.7	28.9	28.0	29.2	29.5	27.1	28.3	27.5	28.6	28.9	
4H	2H	25.0	26.4	25.3	26.6	26.9	24.4	25.8	24.8	26.0	26.3
3H	27.0	28.2	27.4	28.5	28.8	26.3	27.5	26.6	27.8	28.1	
4H	27.9	29.0	28.3	29.3	29.7	27.2	28.2	27.5	28.6	28.9	
6H	28.6	29.6	29.0	29.9	30.3	27.9	28.9	28.3	29.2	29.6	
8H	28.8	29.7	29.2	30.1	30.5	28.2	29.1	28.6	29.5	29.9	
12H	29.0	29.8	29.4	30.2	30.6	28.5	29.3	28.9	29.7	30.1	
8H	4H	28.2	29.1	28.6	29.5	29.9	27.6	28.4	28.0	28.8	29.2
6H	29.1	29.8	29.5	30.2	30.7	28.5	29.2	28.9	29.6	30.1	
8H	29.4	30.1	29.9	30.5	31.0	28.9	29.6	29.4	30.0	30.5	
12H	29.7	30.2	30.2	30.7	31.2	29.3	29.9	29.8	30.3	30.8	
12H	4H	28.2	29.1	28.7	29.4	29.9	27.6	28.4	28.0	28.8	29.2
6H	29.2	29.8	29.6	30.3	30.7	28.6	29.3	29.1	29.7	30.1	
8H	29.6	30.1	30.0	30.6	31.1	29.1	29.7	29.6	30.1	30.6	
Variations with the observer position at spacings (CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.1 / - 0.4					+ 0.1 / - 0.3					

With our continuous efforts to upgrade the technology/product, all product specifications and data are subject to change without prior notice. We always try to maintain the accuracy of our product images, but due to different viewing conditions, the colors may vary. Images are only for indicative purpose.

Product Dimensions (L x W x H)

1200 X 22 X 45 mm (Tol. \pm 5 mm)

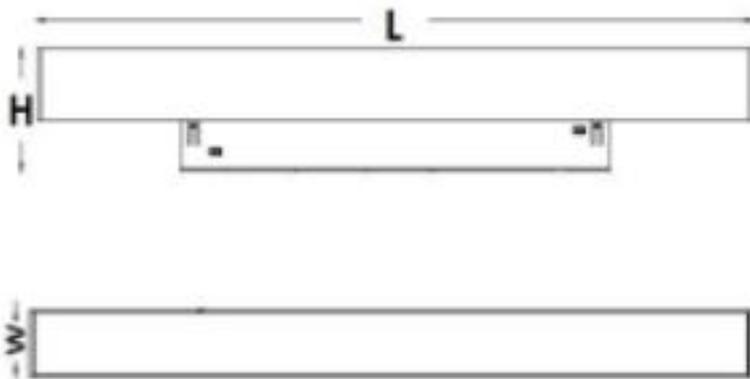

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.