



BATH + LIGHT




GEMINI WALL LIGHT 10W

LED GEMINI WALL LIGHT

Outdoor Luminaire

Product Code: LWWL14S010XW

10W - 190lm - 3000K - CRI>80 Ra - Beam Angle-74°



Technical Specifications


Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	220-240VAC /50Hz
Rated Input Wattage	10W \pm 10%
Rated Input Current	0.090 Amp (Nominal)
Power Factor	≥ 0.5
Rated Luminous Flux	190 lm.(For Rectangle shape only)
Rated Luminaire Efficacy	19 lm/W.(For Rectangle shape only)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	74°(within the permissible limits)
Driver Efficiency	$\geq 80\%$
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Housing with Grey Powder Coating
Lens / Reflector	Reflector
Mounting	Surface / Wall

Protections

Over Voltage Protection	Withstand upto 300 V/AC for 4 Hrs.
Surge Protection	± 2.0 KV
Ingress Protection (IP Rating)	IP54
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

Product Dimensions (LxWxH)

110 X 110 X 55 mm (Tol. ± 5 mm)

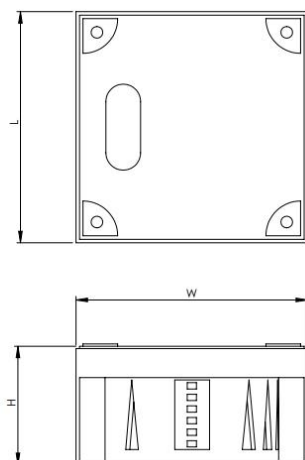

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals and for other outdoor application.

