



Applications:

Accent & Architectural, Plants & Landscape, Public Spaces and Urban Design, Memorials and Monuments



LORETTE GRAZER WALL WASHER

Accentuate Textures,
Create Impact.

FEATURES



IP66
Rated



IK06
Rated



Operating
temperature
-10° to +50°C



Ideal for
humid
outdoor use



Life span
50,000
hours



CRI
> 80

Product Technical Specifications

Wattage	12W	18W	24W	48W
Correlated Colour Temperature (CCT)		2700K/3000K/RGBW(W=3000K)		
Colour Rendering Index(CRI)		≥80		
Beam Angle	10° / 15° / 15°x50° / 20° / 20°x55° / 30° / 30°x60° / 60°			
Efficacy 4000K		>80-90 lm/W		
Efficacy RGBW		>40-50lm/W		
Lumen Maintenance/ Working hours	L70B50 (50,000 Hrs @ 25°C)			
Cover Lens	Tempered glass			
Housing	Die-casting and Extruded Aluminium			
Product Finish	Powder coated			
IP Rating	IP66			
IK Rating	IK06			
Dimension	L1000XW31xH62MM	L1000XW37xH65MM		
Operating temperature	-10°C to +50°C			
Storage temperature	-30°C to +60°C			
Environment	Outdoor			
Humidity	85%, non condensing			



Chart for size and wattage

Size	Wattage available
1000MM	12W /18W /24W /48W
500MM	6W /9W /12W /24W
300MM	4W /5W /6W /12W

Optional Accessories

Profile	Visor / Louver
---------	----------------


Mandatory Accessories

Power supply	200W (for DC)
Accessories	Starter cable, Interconnection cable, End cap


Electrical Specifications

Input Voltage	DC24V
Power Consumption (Max)	12W, 18W, 24W, 48W
Fixture Interconnection	Refer to system diagram


Dimensions (Diagram)

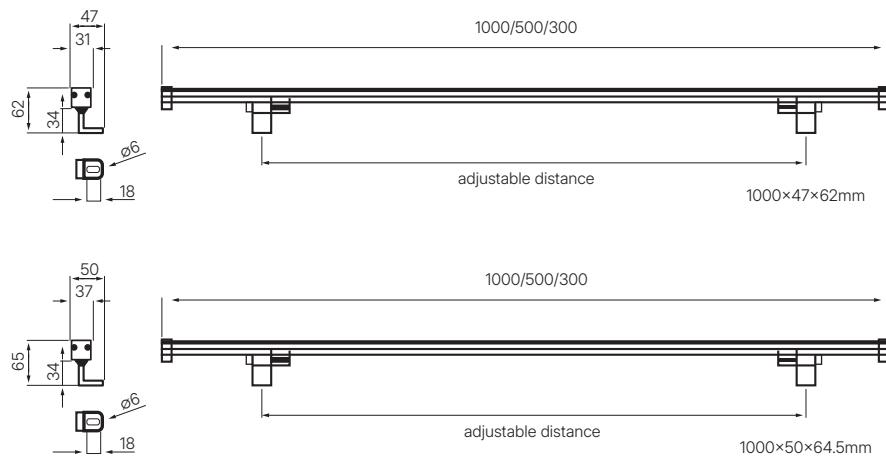

Installation Instructions

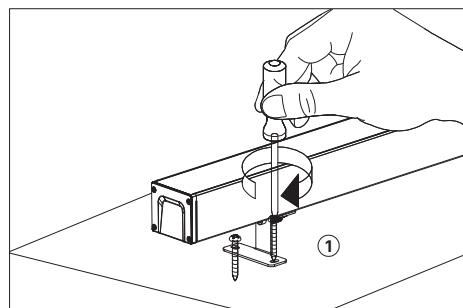


1. Fix the fixture with screws on the surface of the mounted object, make sure the fixing position.

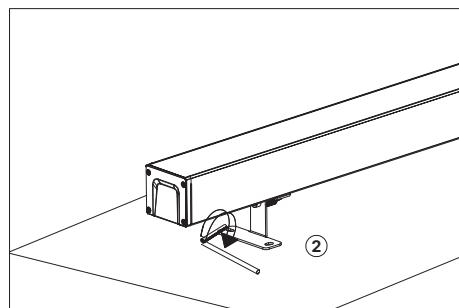

2. Rotate the fixture body to a suitable projection angle.

Connection Diagram Mono

1. Wall Washer Light Wiring diagram of On/Off (DC powered version)

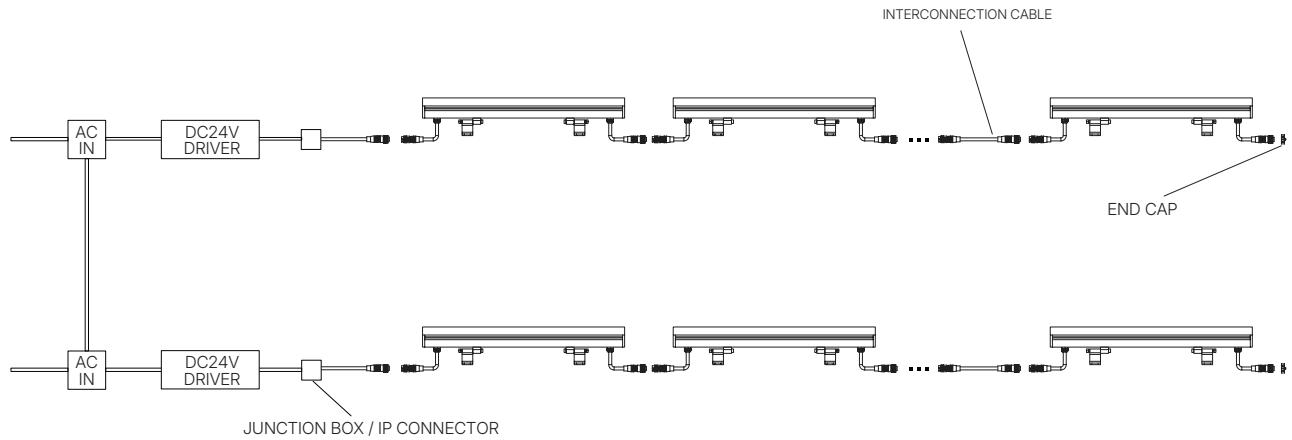

2. Wall Washer Light Wiring diagram of DMX (DC powered version)

