


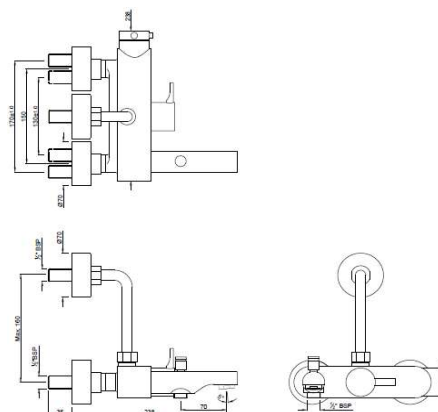

|                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Code</b>                                                                                                                                                                                                                                                                                                             | FLP-CHR-5663PMWBP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Description</b>                                                                                                                                                                                                                                                                                                              | Exposed Thermostatic Bath & Shower Mixer 3-in-1 System with Provision for both Hand Shower and Overhead Shower Complete with 115mm Long Bend Pipe, Connecting Legs & Wall Flange (without Hand & Overhead Shower)                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Flow Rate</b>                                                                                                                                                                                                                                                                                                                | 23.45 LPM @ 3 bar                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Flow regulator</b>                                                                                                                                                                                                                                                                                                           | By using flow regulators (Product should be ordered with suffix as G-2.5 LPM, GA-6.0 LPM, GB-8.0 LPM, GD-3.8 LPM & GE-1.3 LPM @ 4.0 Bar pressure) one can regulate the flow rate.                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Recommended Water Pressure</b>                                                                                                                                                                                                                                                                                               | 0.5 Bar - 5 Bar                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Brass Specification in Percentage</b>                                                                                                                                                                                                                                                                                        | <p><b>Brass Ingots as per IS:1264-1997</b><br/>Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder)</p> <p><b>Brass Rod as per IS:319-1989</b><br/>Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder)</p> <p><b>Brass Sheets as per IS:410-1977</b><br/>Cu (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder)</p> <p><b>Brass Pipe as per IS:407-1996</b><br/>Cu (62.0-65.0), Pb (0.0-0.3), Fe (0.0-0.01), Total Impurity (0.0-0.6), Zn (Remainder)</p> |
| <b>Specification</b>                                                                                                                                                                                                                                                                                                            | <ul style="list-style-type: none"> <li>• Cartridges made of high performance thermostatic polymer materials that meet the global standards for high and low pressure</li> <li>• High technology thermoplastic polymer minimises lime-scale build up</li> <li>• Standard temperature range: 15° C to 60° C (59-104°F)</li> <li>• Shower mixer contains ceramic cartridge for ON &amp; OFF function.</li> <li>• Protected against backflow</li> </ul>                                                                                                                                                   |
| <b>Finish</b>                                                                                                                                                                                                                                                                                                                   | Plating: Nickel-10.0 micron Chromium-0.3 micron<br>Salt Spray (500 hrs + Validated)<br>Adhesion (Pass)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Available Colour Finishing</b>                                                                                                                                                                                                                                                                                               | Black Chrome (BCH) & Black Matt (BLM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| * As per in-house testing done on automatic life cycle testing machine made by Giussani, Italy                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. 10% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice. |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |