
jaquar.com



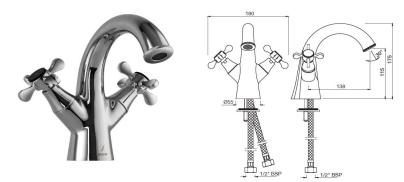

Product Code	QQP-CHR-7167BPM
Description	Central Hole Basin Mixer without Popup Waste System with 450mm Long Braided Hoses
Connection Size	Braided hoses, 1/2" FIP (WRAS Approved) Withstand pressure of 10 Bar
Flow Rate	18.20 LPM @ 3 bar
Flow regulator	By using flow regulators (Product should be ordered with suffix as G-2.5 LPM, GA-6.0 LPM, GB-8.0 LPM, GD-3.8 LPM & GE-1.3 LPM @ 3.0 Bar pressure) one can regulate the flow rate.
Recommended Water Pressure	0.5 Bar - 5 Bar
	Brass Ingots as per IS:1264-1997 Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder)
Brass Specification in Percentage	Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder) Brass Sheets as per IS:410-1977
Cartridge Specification	Cu (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder) Fittings : Components have WRAS Approved for food grade conformity with Brass Housing and Spindle Life Cycle EN 200: 200,000 cycles (Standard)
	- 5.0 LAC Cycles as per EN 200*
Water Tightness	16 bar (Pass)
Pressure Resistance	25 bar (Pass)
Finish	Plating: Nickel-10.0 micron Chromium-0.3 micron Salt Spray (500 hrs + Validated) Adhesion (Pass)
Aerator Size	WRAS, ACS Approved (24X1)
Available Colour Finishing	Antique Bronze (ABR), Antique Copper (ACR), Black Chrome (BCH), Black Matt (BLM), Gold Dust (GDS), Auric Gold (GLD), Graphite (GRF), Stainless Steel Finish (SSF) & White Matt (WHM)
* As per in-house testing done or	automatic life cycle testing machine made by Giussani, Italy
	s been made to ensure factual accuracy, the information presented subject to changes due to narkets and/ or countries. 10% variation in flow rate may be possible. Jaquar reserves the

right to make the necessary amendments at any time without prior notice.