



## BATH + LIGHT


### STRELLA ROUND 15W

STRELLA ROUND DOWNLIGHT

Indoor Luminaire

Product Code:

LSTA01R015XC / LSTA01R015XN / LSTA01R015XW  
15W - 1500lm - 6500K - CRI>80 Ra - Beam Angle 110°



### Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	230 VAC, 50Hz
Rated Input Wattage	15W $\pm$ 10%
Rated Input Current	0.068 Amp (Nominal)
Power Factor	$\geq$ 0.90
ATHD	<15%
Rated Luminous Flux	1500 lm / 1425 lm / 1350 lm (tolerance as per BIS)
Rated Luminaire Efficacy	100 lm/W / 95 lm/W / 90 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	110° (within the permissible limits)
Driver Efficiency	$\geq$ 85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	PC. housing
Lens / Reflector	PC. Diffuser
Mounting	Recess

### Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	$\pm$ 4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Light Distribution

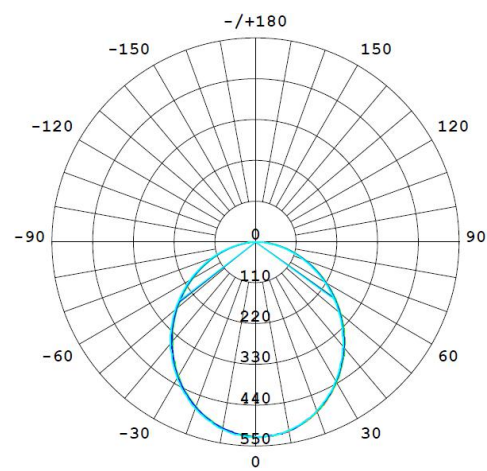


UGR Table

ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise						Viewed endwise				
x = 2H y = 2H	2H	24.7	26.2	25.0	26.4	26.6	24.6	26.1	24.8	26.3	26.5
	3H	26.3	27.7	26.6	27.9	28.2	26.1	27.5	26.4	27.7	28.0
	4H	27.0	28.3	27.3	28.5	28.8	26.7	28.1	27.0	28.3	28.6
	6H	27.5	28.8	27.8	29.0	29.3	27.2	28.5	27.5	28.7	29.0
	8H	27.7	28.9	28.1	29.2	29.5	27.4	28.6	27.7	28.9	29.2
	12H	27.9	29.0	28.2	29.3	29.6	27.5	28.7	27.8	29.0	29.3
4H	2H	25.3	26.6	25.6	26.9	27.2	25.2	26.5	25.5	26.8	27.1
	3H	27.1	28.3	27.5	28.6	28.9	26.9	28.1	27.3	28.4	28.7
	4H	27.9	29.0	28.3	29.3	29.6	27.7	28.8	28.1	29.1	29.4
	6H	28.6	29.6	29.0	29.9	30.3	28.3	29.3	28.7	29.6	30.0
	8H	28.9	29.8	29.3	30.1	30.5	28.6	29.5	29.0	29.8	30.2
	12H	29.1	29.9	29.5	30.3	30.7	28.7	29.6	29.2	29.9	30.3
8H	4H	28.2	29.1	28.6	29.5	29.9	28.0	28.9	28.5	29.3	29.7
	6H	29.1	29.8	29.5	30.2	30.7	28.8	29.6	29.3	30.0	30.4
	8H	29.5	30.1	29.9	30.6	31.0	29.2	29.8	29.6	30.3	30.7
	12H	29.8	30.4	30.3	30.8	31.3	29.5	30.0	29.9	30.5	30.9
12H	4H	28.3	29.1	28.7	29.4	29.9	28.1	28.9	28.5	29.3	29.7
	6H	29.2	29.8	29.6	30.3	30.7	28.9	29.6	29.4	30.0	30.5
	8H	29.6	30.2	30.1	30.6	31.1	29.3	29.9	29.8	30.3	30.8
Variations with the observer position at spacings(CIE Pub.117) :											
S = 1.0H	+ 0.1 / - 0.2						+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3						+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3						+ 0.1 / - 0.3				

With our continuous efforts to upgrade the technology/product, all product specifications and data are subject to change without prior notice. We always try to maintain the accuracy of our product images, but due to different viewing conditions, the colors may vary. Images are only for indicative purpose.

## Product Dimensions (Dia..x H)

Ø162 x 35 mm (Tol.  $\pm 5$  mm), Cutout Size Ø155 mm

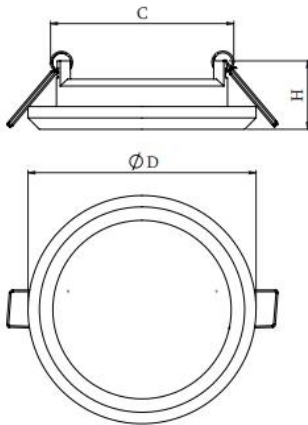

## Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.