



INSTALLATION GUIDE

Requirements:-


- ◆ Wall plug ,screw (Included)
- ◆ Screw Driver, drill machine.
- ◆ Soft Hammer for inserting wall plug.

Note: THIS INSTALLATION MANUAL CAN BE REFERRED FOR WALL OUTLET ,THREAD TO CONNECT HAND SHOWER PIPE & FANGE.




HOW TO INSTALL

A

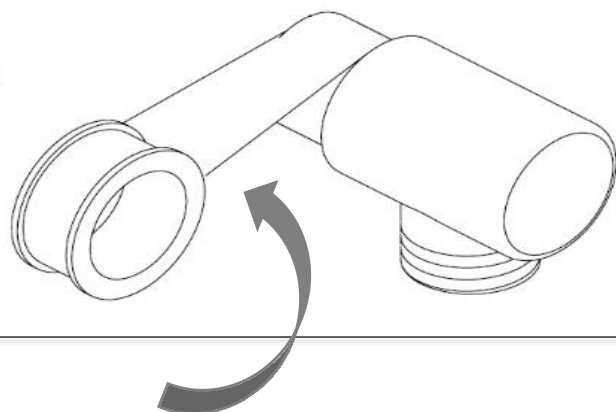


Apply Teflon Tape


B

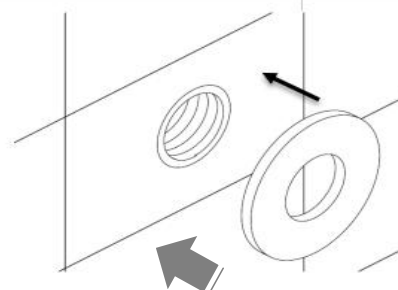


C

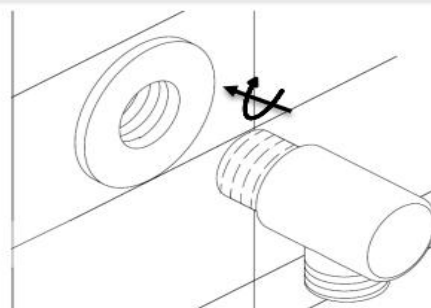

D

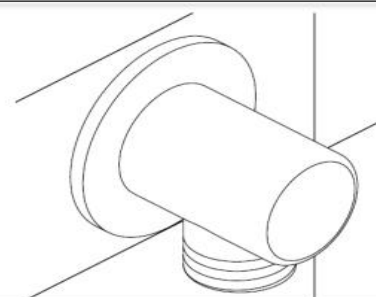

A

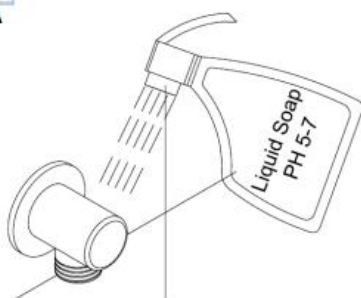

B

Wet Cotton Cloth



C



D


Dry Cotton Cloth



POWDER SOAP



SCRUB





Safety Tips:-

- ❖ Tighten any loose screws or hardware.
- ❖ Use proper eyewear while perform drilling work.
- ❖ Place the Item at Reachable Height.
- ❖ Use soft Hammer to avoid damage.



Correct Cleaning Steps:

1. Apply Liquid Soap (pH ~7):

Use a mild liquid soap (pH 5-7) or Glitz solution with a neutral water.

Spray it gently on the Outer surface of Product.

2. Use a Soft Cotton Cloth:

Wipe the Product with a soft cotton cloth to remove dirt, stains, or water marks.

This prevents scratches and keeps the surface shiny.

3. Rinse with Water:

Spray clean water on the fitting after wiping with soap. This helps remove any soap residue.

4. Final Wipe with Soft Cotton Cloth:

Again, wipe with a soft cotton cloth to dry the fitting. This ensures no water spots are left.

✗ Don'ts (Avoid These):

Don't use Powder Soap:

It can be abrasive and scratch the fitting surface.

Don't use Scrubbing Pads:

Scrubbing with rough materials can damage the finish and reduce shine.



Note: THIS INSTALLATION MANUAL CAN BE REFFERED FOR WALL OUTLET ,THREAD TO CONNECT HAND SHOWER PIPE & FANGE.