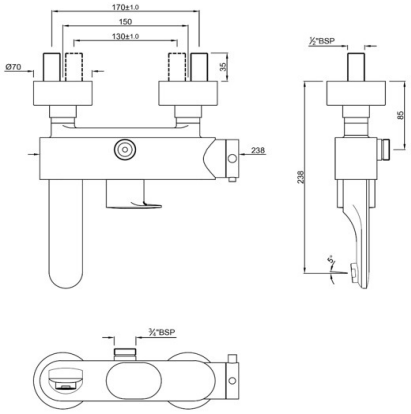

Product Code	OPP-CHR-15615PM
Description	Exposed Thermostatic Bath & Shower Mixer with Provision for Connection to Exposed Shower Pipe (SHA-1211N), Connecting Legs and wall flanges
Flow Rate	25.54 LPM @ 3 bar
Flow regulator	By using flow regulators (Product should be ordered with suffix as G-2.5 LPM, GA-6.0 LPM, GB-8.0 LPM, GD-3.8 LPM & GE-1.3 LPM @ 4.0 Bar pressure) one can regulate the flow rate.
Recommended Water Pressure	0.5 Bar - 5 Bar
Brass Specification in Percentage	**Brass Ingots as per IS:1264-1997** Cu (58.0-63.0), Sn (0.0-1.0), Pb (0.5-2.5), Ni (0.0-1.0), Al (0.2-0.8), Mn (0.0-0.5), Total Impurity (0.0-2.0), Zn (Remainder) **Brass Rod as per IS:319-1989** Cu (56.0-59.0), Pb (2.0-3.5), Fe (0.0-0.35), Total Impurity (0.0-0.7), Zn (Remainder) **Brass Sheets as per IS:410-1977** Cu (61.5-64.5), Pb (0.0-0.3), Fe (0.0-0.075), Total Impurity (0.0-0.6), Zn (Remainder)
Specification	• Cartridges made of high performance thermostatic polymer materials that meet the global standards for high and low pressure • High technology thermoplastic polymer minimises lime-scale build up • Standard temperature range: 15° C to 60° C (59-104˚F) • Shower mixer contains ceramic cartridge for ON & OFF function. • Protected against backflow
Finish	Plating: Nickel-10.0 micron Chromium-0.3 micron Salt Spray (500 hrs + Validated) Adhesion (Pass)
Available Colour Finishing	Antique Bronze (ABR), Antique Copper (ACR), Black Chrome (BCH), Blush Gold Bright PVD (BGP), Black Matt (BLM), Gold Bright PVD (GBP), Gold Matt PVD (GMP), Graphite (GRF) & Stainless Steel Finish (SSF).
* As per in-house testing done on automatic life cycle testing machine made by Giussani, Italy	
DISCLAIMER: Our every effort has been made to ensure factual accuracy, the information presented subject to changes due to requirements in different sites, markets and/ or countries. 10% variation in flow rate may be possible. Jaquar reserves the right to make the necessary amendments at any time without prior notice.	